60m | IP54 | 4x3,5W LED | 8x3,5W LED | Colour

# CUBE H-600

**Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.**
Modern, cubic luminaire housing made of anodized aluminum frame and folding upper part made of polycarbonate. The luminaire comes with three printed pictogram panes - arrow left/right/down (Visibility distance 60 m) and one opal pane. The product is of very rugged construction and quick to install.
The luminaire is equipped with 8 x 3,5 Watt (central power supply) or 4 x 3,5 Watt (self contained version) high-power LED technology.
**The self contained version is not in line with DIN 4844-1.**




## Technical specifications

| Luminaire type | Luminaires for central battery systems | Self contained luminaires |
|---|---|---|
| Illuminant | 8 x 3.5 W LED-bar | 4 x 3.5 W LED-bar |
| Visibility distance | 60 m | |
| Luminance | DIN 4844-1 > 500 cd/m² | – |
| Connecting terminals | 2 x 2.5 mm² for double assignment | |
| Colour | white aluminum (silver) | |
| Material | Polycarbonate/Aluminum | |
| Mounting type | Ceiling mounting | |
| Additional mounting types* | Ceiling mounting (wire suspension) | |
| Dimensions (W x H x D) | DM 655 x 385 x 655 mm | |
| Protection class | IP54 | |
| Safety class | II | |
| IK Safety class | IK03 | |
| Light current (mains) | 4000 lm | 950 lm |
| Luminous flux Emergency (DC) / mains | | |
| Battery duration 1h | – | 35% / 100% |
| Battery duration 3h | – | 35% / 100% |
| Battery duration 8h | – | 35% / 100% |
| Power consumption | 35 VA | 18 VA |
| Battery current input | 145 mA | – |
| Battery duration Battery operation | – | 1h / 3h / 8h |
| Voltage supply | 230V 50/60Hz; 220V DC +25/-20% | 230V 50/60Hz |
| NiMH-battery | | |
| Battery duration 1h | – | 4,8V 2,0Ah |
| Battery duration 3h | – | 4,8V 2,0Ah |
| Battery duration 8h | – | 4,8V 4,2Ah |
| Temperature range | -10°C to +40°C | – |
| Non-maintained mode | – | 0°C to +35°C |
| Maintained mode | – | -5°C to +30°C |
| optional | | |
| Multi-switch and monitoring module | DALI<br>ELC<br>MSÜ3<br>SET009<br>SET010/025 | – |
| Self monitoring | – | SELF CHECK |
| Central monitoring | – | SAFELOG Line |
| Wireless monitoring | – | SAFELOG Wireless |

* Optional accessory required

## Ceiling mounting

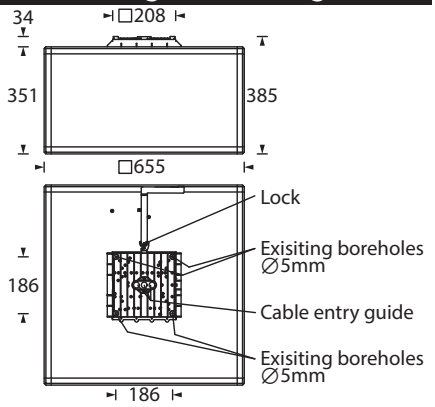




Technical changes reserved / 05.11.2026

## Pictogram-set - included in the delivery



## Accessories

| |
|---|
| Chain assembly set |
| Cable assembly set |
| Pictograms |