

Status and control panel

Remote display for BUS hubs SAFELOG and LPS

Decentralized status panel to connect to the self-contained luminaire bus system SAFELOG and the central battery system LPS. Status display; if there is a mains failure, system functions are still displayed.

Status panel for wall mounting. Housing made of polycarbonate. Integrated key switch to switch an input, for example to change between maintained and non-maintained mode. Switching by an unauthorised person is not possible.



Equipment

- Decentralised status and control panel to use at SAFELOG systems and the central battery system LPS
- Quick information about working status with LED
- Key control to switch between input sources e.g. switch from maintain to none-maintain mode

Technical specifications and order information


Status and control panel MFT4

Connecting terminals	0.6 mm ² to 2.5 mm ²
Material	Polycarbonate
Mounting type	Wall mounting
Dimensions (W x H x D)	90 x 112 x 65 mm
Power consumption	1,0 W
Max. cable length	200 m
Recommended cable	J-Y(ST) Y 4 x 2 x 0.8 mm
Power supply	24V DC
Ambient temperature	-20°C to +40°C
Protection class	IP20
Safety class	III


Order number 910015

Suitable for following systems:

SAFEBOX II 230-200-S	SAFEBOX II 230-500-S	SAFELOG TOUCH WIRELESS
SAFEBOX II 230-500-M	SAFELOG TOUCH	

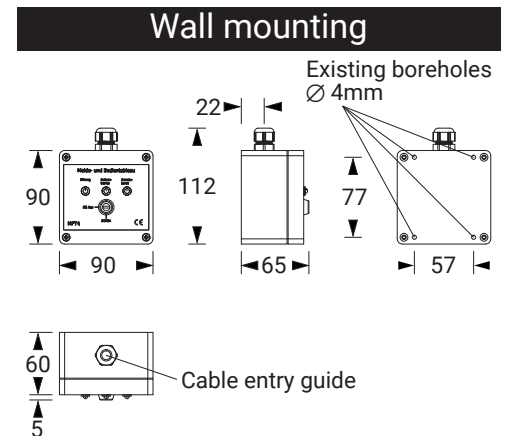

Terminal diagrams: ATS-SAFELOG

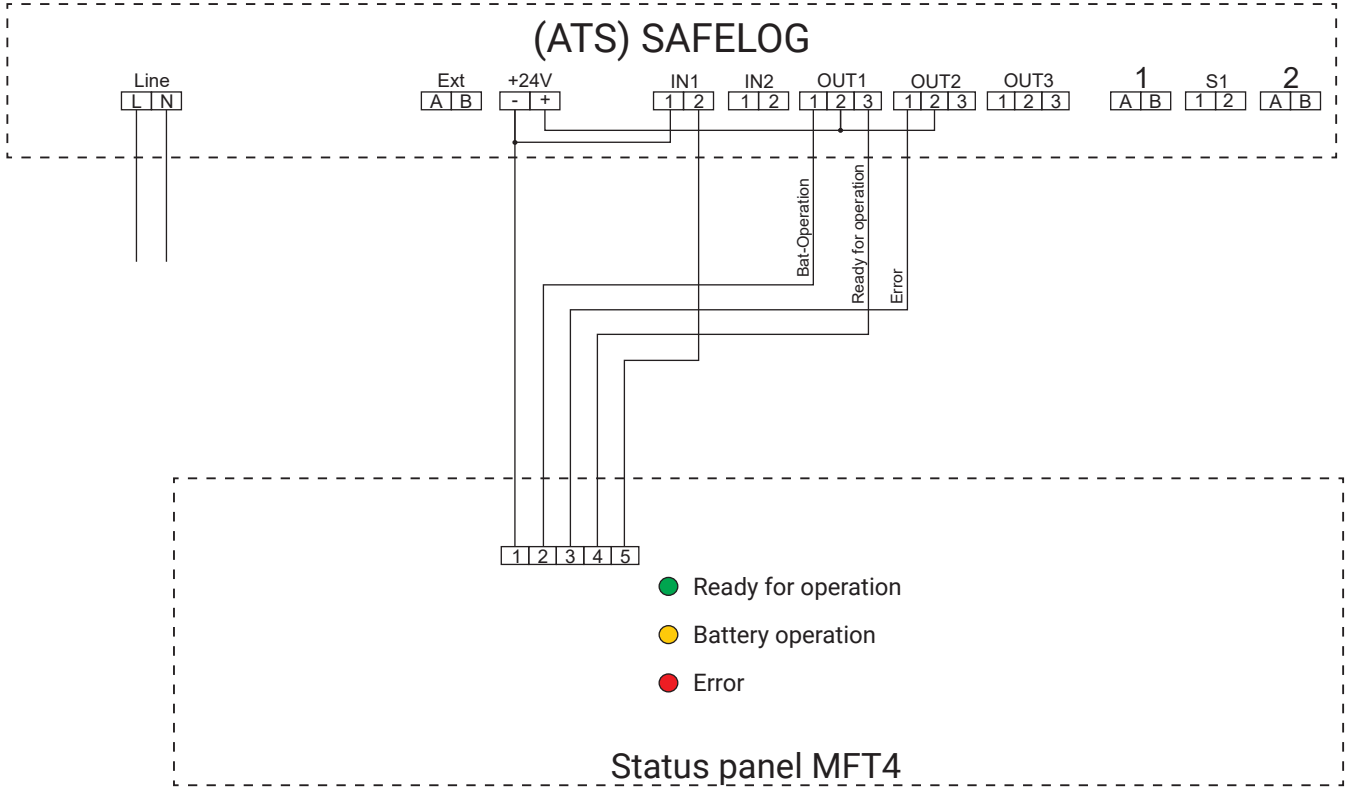

Terminal diagrams: LPS-SAFEBOX

