

# Changeover switch UW5

## Changeover switch for luminaire installation

For connection to final circuits in non-maintained mode of emergency escape lighting systems. Mains input of the general supply for switching and supplying the connected luminaire in normal operation.

Emergency supply input for priority switch-on and supply of the connected luminaire via the emergency escape lighting systems if the general mains supply fails.




## Technical specifications and order information

### Changeover switch UW5

Connecting terminals	1.5 mm <sup>2</sup>
Material	Polycarbonate
Mounting type	Luminaire installation
Dimensions (W x H x D)	78 x 23 x 30 mm
Mains supply	230V AC 50/60 Hz
Emergency supply	176-270V AC/DC
Connected load	250 W / 250 VA
Switching time	ca. 200 ms
Protection class	IP20
Safety class	II

### Luminaire installation

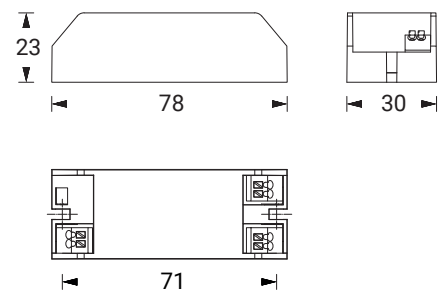


**Order number** 580548

#### Suitable for following systems:

SAFEBOX 230-200      SAFEBOX II 230-200-S      SAFEBOX II 230-500-S  
 SAFEBOX 230-500      SAFEBOX II 230-500-M

## Connection

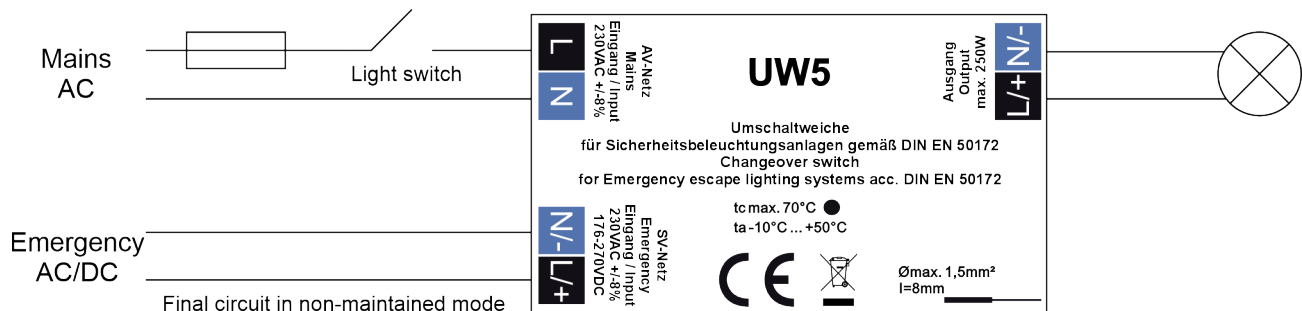

## Function

Mains	Emergency	Output
0	0	0
1	0	1
0	1	1
1	1	1