23m | IP54 | 2W LED | Colour

SMARTLUX 200 DM

MADE in GERMANY

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.
Elegant, modern IP54 escape sign luminaire made of white polycarbonate with clear cover and simple, screwless mounting by click system.
Luminaire for pictograms on both sides for ceiling mounting.
The luminaire price includes one pictogram foil set - arrow left/right/down/up/blind (Visibility distance 23 m).
The luminaire is equipped with a 2 Watt LED-bar.




Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	2 W LED-bar	2 W LED-bar
Visibility distance	23 m	
Luminance	DIN 4844-1 > 500 cd/m²	
Connecting terminals	2 x 2.5 mm² for double assignment	
Colour	white	
Material	Polycarbonate (light cover clear)	
Mounting type	Ceiling mounting	
Additional mounting types*	wall bracket mounting, Ceiling mounting (wire suspension), Pendulum mounting	
Dimensions (W x H x D)	DM 243 x 149 x 62 mm	
Protection class	IP54	
Safety class	II	
IK Safety class	IK03	
Light current (mains)	240 lm	240 lm
Luminous flux Emergency (DC) / mains		
Battery duration 1h	–	30% / 100%
Battery duration 3h	–	30% / 100%
Battery duration 8h	–	15% / 100%
Power consumption	5.5 VA	5.5 VA
Battery current input	14 mA	–
Battery duration Battery operation	–	1h / 3h / 8h
Voltage supply	–	230V 50/60Hz
NiMH-battery		
Battery duration 1h	–	4,8V 0,8Ah
Battery duration 3h	–	4,8V 0,8Ah
Battery duration 8h	–	4,8V 0,8Ah
Temperature range	–	
Non-maintained mode	–	0°C to +35°C
Maintained mode	–	-5°C to +30°C
optional		
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010	–
Self monitoring	–	SELF CHECK
Central monitoring	–	SAFELOG Line
Wireless monitoring	–	SAFELOG Wireless

* Optional accessory required

Ceiling mounting

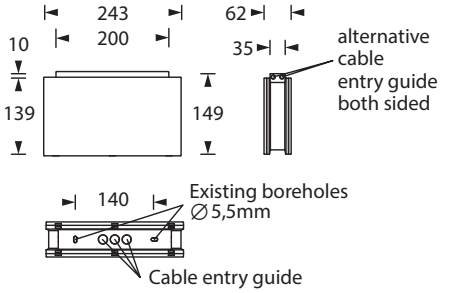

Technical changes reserved / 04.11.2026

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Universal cover plate
Chain assembly set
Central pendulum - Plastic
Cable assembly set
Wall bracket
Pictograms