

SMARTLUX 300 DM

Exit luminaire in compliance with EN 60598-1/2-22 and EN 1838.

Elegant, modern IP54 escape sign luminaire made of white polycarbonate with clear cover and simple, screwless mounting by click system.

Luminaire for pictograms on both sides for ceiling mounting.

The luminaire price includes one pictogram foil set - arrow left/right/down/up/blind (Visibility distance 30 m).

The luminaire is equipped with a 3 Watt LED-bar.


Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	3 W LED-bar	3 W LED-bar
Visibility distance	30 m	
Connecting terminals	2 x 2.5 mm ² for double assignment	
Colour	white	
Material	Polycarbonate (light cover clear)	
Mounting type	Ceiling mounting	
Additional mounting types*	wall bracket mounting, Ceiling mounting (wire suspension), Pendulum mounting	
Dimensions (W x H x D)	DM 313 x 184 x 62 mm	
Protection class	IP54	
Safety class	II	
IK Safety class	IK03	
Light current (mains)	350 lm	350 lm
Luminous flux	-	20% / 100%
Emergency (DC) / mains		
Battery duration 1h		
Battery duration 3h		
Battery duration 8h	-	10% / 100%
Power consumption	6 VA	6 VA
Battery current input	19 mA	-
Battery duration	-	1h / 3h / 8h
Battery operation	-	
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery	-	4,8V 0,8Ah
Battery duration 1h		
Battery duration 3h		
Battery duration 8h		
Temperature range	-10°C to +40°C	-
Non-maintained mode	-	0°C to +35°C
Maintained mode	-	-5°C to +30°C
optional	DALI ELC MSÜ3 SET009 SET010	-
Multi-switch and monitoring module		
Self monitoring		
Central monitoring		
Wireless monitoring	-	SELF CHECK SAFELOG Line SAFELOG Wireless

* Optional accessory required



Ceiling mounting

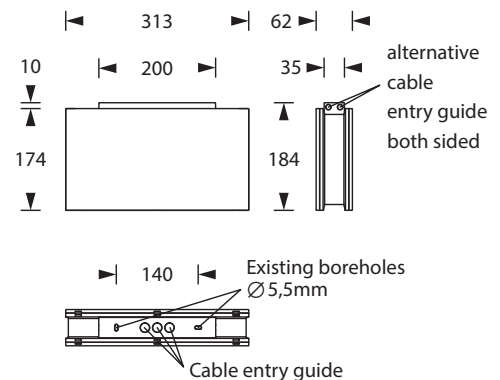

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Universal cover plate
Chain assembly set
Central pendulum - Plastic
Cable assembly set
Wall bracket
Pictograms