



L-PLAST 200 UM

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.

Polycarbonate housing with opal light cover for one- or two-sided pictogram attachment with high cover for wall or ceiling mounting.

Optional the luminaire is available with a heating case with battery (4,8V 0,8Ah) to use in environments with lowest permissible temperature of -20°C within the luminaire. The luminaire price includes one pictogramfoil set - arrow left/right/down/up (Visibility distance 18 m).

The luminaire is supplied with a 1.5 Watt LED-bar.




Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	1.5 W LED-bar	1.5 W LED-bar
Visibility distance	18 m	
Luminance	DIN 4844-1 > 500 cd/m²	
Connecting terminals	2 x 2.5 mm² for double assignment	
Colour	white	
Material	Polycarbonate (light cover opal)	
Mounting type	Wall-/ceiling mounting	
Additional mounting types*	wall bracket mounting, Ceiling mounting (wire suspension), Pendulum mounting	
Dimensions (W x H x D)	WM/DM 372 x 132 x 94 mm	
Protection class	IP54	
Safety class	II	
IK Safety class	IK03	
Light current (mains)	190 lm	190 lm
Luminous flux		
Emergency (DC) / mains		
Battery duration 1h	–	40% / 100%
Battery duration 3h	–	40% / 100%
Battery duration 8h	–	20% / 100%
Power consumption	5 VA	5 VA
Battery current input	12 mA	–
Battery duration	–	1h / 3h / 8h
Battery operation		
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Battery duration 1h	–	4,8V 0,8Ah 4,8V 0,8Ah + AkH
Battery duration 3h	–	4,8V 0,8Ah 4,8V 0,8Ah + AkH
Battery duration 8h	–	4,8V 0,8Ah 4,8V 0,8Ah + AkH
Temperature range	-10°C to +40°C	–
Non-maintained mode	–	0°C to +35°C
Maintained mode	–	-5°C to +30°C
optional		
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010	–
Self monitoring	–	SELF CHECK
Central monitoring	–	SAFELOG Line
Wireless monitoring	–	SAFELOG Wireless

* Optional accessory required

Wall-/ceiling mounting

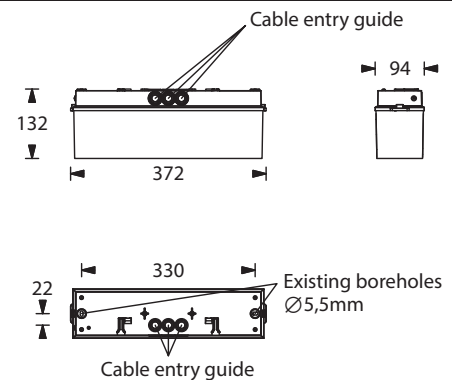

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Wire guard

Universal cover plate

Chain assembly set

Double pendulum set with long canopy

Central pendulum sets with long canopy

Central pendulum - Plastic

Wire sets with long canopy

Cable assembly set

Wall bracket

Set for parallel wall mounting

Pictograms