



# STAIR-LIGHT W

## Safety luminaire in compliance with EN 60598-1/2-22 and EN 1838.

Almost wall-flush luminaire body made of die-cast aluminum, powder-coated in black, rectangular design for recessed wall or step mounting.

The luminaire body is equipped with a high-power LED module and can be inserted into a concrete recessed box.

Can be used as an exit sign luminaire with an optional pictogram set for a viewing distance of 10 meters.


## Technical specifications

| Luminaire type                     | Luminaires for central battery systems        |
|------------------------------------|-----------------------------------------------|
| Illuminant                         | 2 W<br>LED-bar                                |
| Visibility distance                | 10 m                                          |
| Connecting terminals               | 3 x 2.5 mm <sup>2</sup> for double assignment |
| Colour                             | black                                         |
| Material                           | Aluminum die-cast                             |
| Mounting type                      | Wall/step recessed mounting                   |
| Dimensions (W x H x D)             | WE 270 x 85 x 96 mm                           |
| Dimensions wall cutout (L x W)     | 255 x 72 mm                                   |
| Installation depth                 | 124 mm                                        |
| Protection class                   | IP65                                          |
| Safety class                       | I                                             |
| IK Safety class                    | IK07                                          |
| Light current (mains)              | 260 lm                                        |
| Power consumption                  | 5.5 VA                                        |
| Battery current input              | 14 mA                                         |
| Voltage supply                     | 230V 50/60Hz; 220V DC +25/-20%                |
| Temperature range                  | -10°C to +40°C                                |
| optional                           |                                               |
| Multi-switch and monitoring module | DALI<br>ELC<br>MSÜ3<br>SET009<br>SET010       |



Figure shows accessory


## Wall-/step recessed mounting

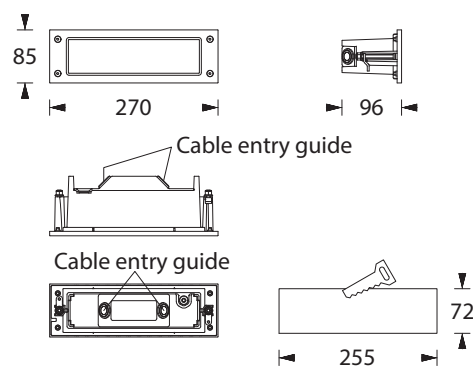

## Accessories

|                             |
|-----------------------------|
| Cement assembly box         |
| Pressure compensation valve |
| Pictograms                  |



Lighting data and tables of luminaire distances (E = 1,25 lx)

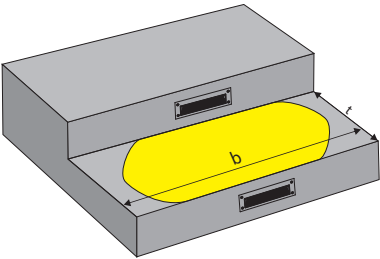

Step mounting

Luminaires for central battery systems

Distance table for plane emergency routes / distance data in meters

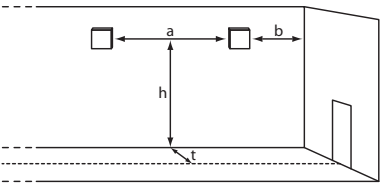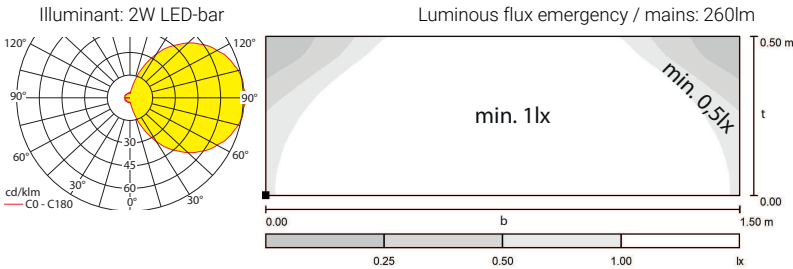

Wall mounting

Luminaires for central battery systems Wide area illumination

Distance table for plane emergency routes / distance data in meters

