

VARIOLINE 200 DMS

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.

Attractive, architectural design by combination of round and angular anodized aluminum profiles. Container for ceiling mounting with rope suspension (rope 1.5m) for the pane unit. Optionally, the luminaire is available from the factory with a 2 x 5 m or a 2 x 10 m conducting cable.


The 10 mm light deflecting pane is illuminated with a 2 Watt LED-bar and supplied with a pictogram set - arrow left/right/down/up/blind (Visibility distance 23 m).

Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	2 W LED-bar	2 W LED-bar
Visibility distance	23 m	
Luminance	DIN 4844-1 > 500 cd/m ²	
Connecting terminals	3 x 2.5 mm ² for double assignment	
Colour	white aluminum (silver)	
Material	Aluminum	
Mounting type	Ceiling mounting (wire suspension)	
Dimensions (W x H x D)	DMS 258 x 187 x 29 mm	
Pane dimensions (W x H x D)	248 x 148 x 10 mm	
Protection class	IP40	
Safety class	I	
IK Safety class	IK03	
Light current (mains)	260 lm	260 lm
Luminous flux		
Emergency (DC) / mains		
Battery duration 1h	–	30% / 100%
Battery duration 3h	–	30% / 100%
Battery duration 8h	–	15% / 100%
Power consumption	5.5 VA	5.5 VA
Battery current input	14 mA	–
Battery duration	–	1h / 3h / 8h
Battery operation		
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Battery duration 1h	–	4,8V 0,8Ah
Battery duration 3h	–	4,8V 0,8Ah
Battery duration 8h	–	4,8V 0,8Ah
Temperature range	-10°C to +40°C	–
Non-maintained mode	–	0°C to +35°C
Maintained mode	–	-5°C to +30°C
optional		
Multi-switch and monitoring module	ELC MSÜ3 SET009 SET010	–
Self monitoring	–	SELF CHECK
Central monitoring	–	SAFELOG Line
Wireless monitoring	–	SAFELOG Wireless



Ceiling mounting (wire suspension)

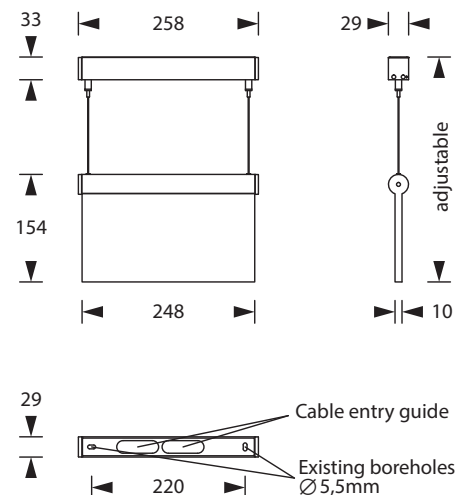

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Universal cover plate
Pictograms