



WALL-STAR XL EQ-R

Safety luminaire in compliance with EN IEC 60598-1/2-22 and EN 1838.

Almost wall-flush luminaire body made of die-cast aluminum, powder-coated in white or black in rectangular design for installation in device boxes with optics for escape route illumination.

A rectangular surface-mounted housing for wall surface mounting is available as an option.

Technical specifications


Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	3 W LED	3 W LED
Connecting terminals	3 x 2.5 mm ² for double assignment	
Colour	white / black	
Material	Aluminum die-cast	
Mounting type	Wall recessed mounting	
Additional mounting types*	Wall mounting	
Dimensions (W x H x D)	WE 150 x 24 x 90 mm	
Protection class	IP40	
Safety class	I	
IK Safety class	IK03	
Light current (mains)	280 lm	120 lm
Light current (emergency)		
Battery duration 1h	–	280 lm
Battery duration 3h	–	280 lm
Battery duration 8h	–	120 lm
Luminous flux		
Emergency (DC) / mains		
Battery duration 1h	–	100% / 45%
Battery duration 3h	–	100% / 45%
Battery duration 8h	–	45% / 45%
Power consumption	6 VA	5 VA
Battery current input	15 mA	–
Battery duration	–	1h / 3h / 8h
Battery operation	–	–
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Battery duration 1h	–	4,8V 2,0Ah
Battery duration 3h	–	4,8V 2,0Ah
Battery duration 8h	–	4,8V 2,0Ah
Temperature range	-10°C to +40°C	–
Non-maintained mode	–	0°C to +35°C
Maintained mode	–	-5°C to +30°C
optional		
Multi-switch and monitoring module	ELC MSÜ3 SET009 SET010	–
Self monitoring	–	SELF CHECK
Central monitoring	–	SAFELOG Line
Wireless monitoring	–	SAFELOG Wireless

* Optional accessory required



Figure shows accessory

Wall recessed mounting

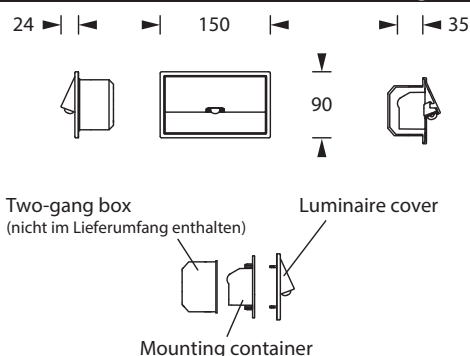


Two-gang box
(nicht im Lieferumfang enthalten)

Luminaire cover

Mounting container

Wall mounting

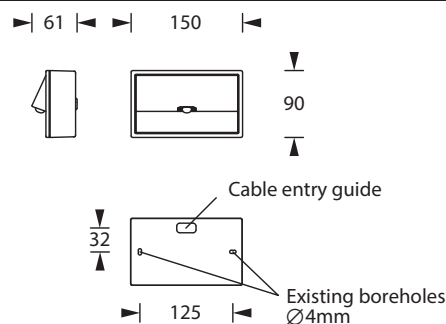

Accessories


Construction set XL

Use in device boxes

The following device boxes are compatible with the luminaire (not included in the scope of delivery)

Type	Manufacturer	Manufacturer Art. No.	Remarks
Two-gang boxes for cavity wall installation	KAISER	9062-02	Wall cutout: 2x Ø 68 mm
Two-gang boxes for flushmounting installation	KAISER	1656-21	Wall cutout: 2x Ø 60 mm
Two-gang boxes for outside mixed concrete	KAISER	1269-01	Wall cutout: 60 x 131 mm


Lighting data and tables of luminaire distances (E = 1,25 lx)

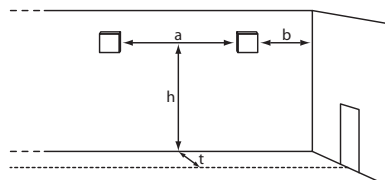

Wall mounting


Luminaires for central battery systems escape route optics

Distance table for plane emergency routes / distance data in meters

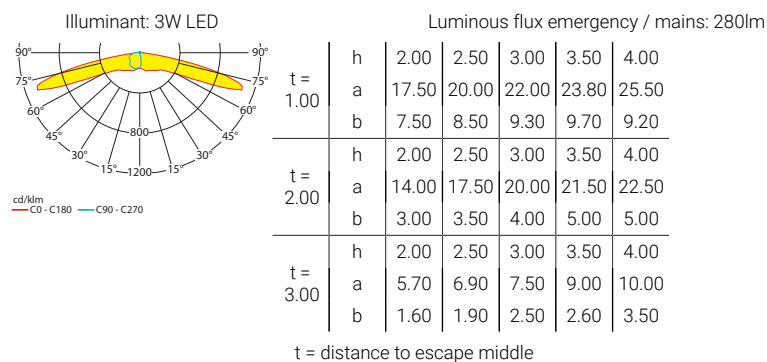


Self contained luminaires escape route optics


Distance table for plane emergency routes / distance data in meters

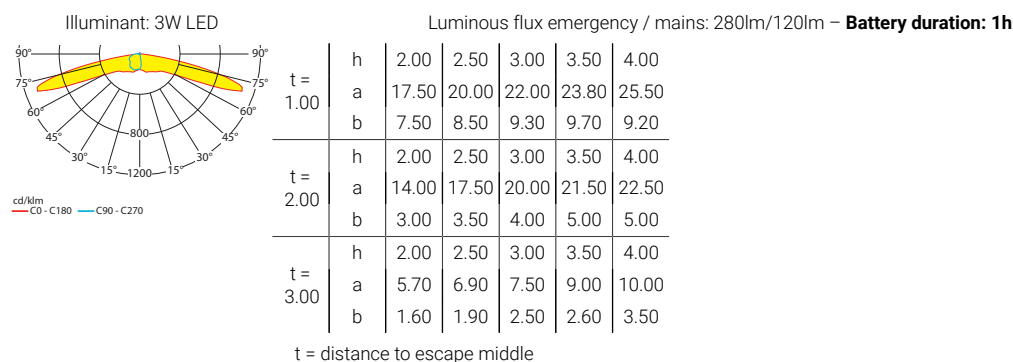

Self contained luminaires escape route optics

Distance table for plane emergency routes / distance data in meters

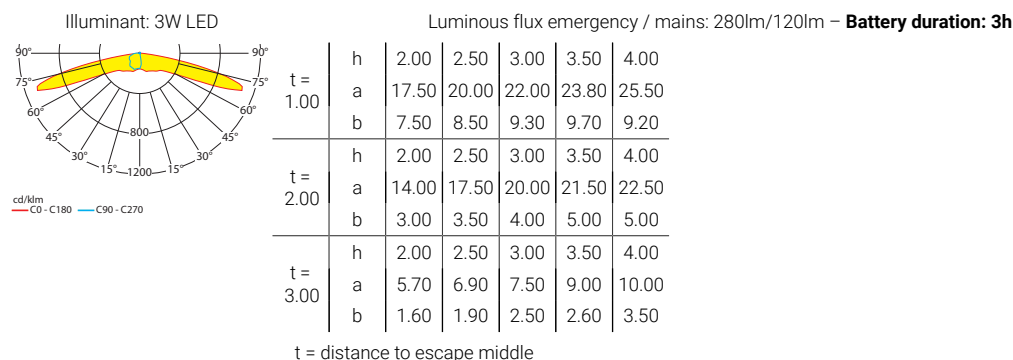



Luminous flux emergency / mains: 120lm/120lm – Battery duration: 8h						
t = 1.00	h	2.00	2.50	3.00	3.50	4.00
	a	13.60	15.70	16.50	16.30	14.20
	b	5.50	5.30	5.00	4.20	3.80
t = 2.00	h	2.00	2.50	3.00	3.50	4.00
	a	4.80	5.70	6.30	7.70	8.20
	b	1.20	2.00	2.70	2.90	2.50

t = distance to escape middle