



L-PLAST 300 UM

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.

Polycarbonate housing with opal luminaire cover for pictograms on both sides for wall or ceiling mounting. For wall mounting, an unobtrusive wall mounting bracket with click system is included.

The luminaire is optionally available with a heating container with rechargeable battery (4.8V 0.8Ah) to extend the temperature range in the luminaire to -20°C.


The luminaire price includes one pictogramfoil set - arrow left/right/down/up (Visibility distance 32 m).

The luminaire is supplied with a 1.5 Watt LED-bar.

Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	1.5 W LED-bar	1.5 W LED-bar
Visibility distance	32 m	
Luminance	DIN 4844-1 > 500 cd/m²	
Connecting terminals	2 x 2.5 mm² for double assignment	
Colour	white	
Material	Polycarbonate (light cover opal)	
Mounting type	Wall-/ceiling mounting	
Additional mounting types*	wall bracket mounting, Ceiling mounting (wire suspension), Pendulum mounting	
Dimensions (W x H x D)	WM/DM 372 x 206 x 94 mm	
Protection class	IP54	
Safety class	II	
IK Safety class	IK03	
Light current (mains)	190 lm	190 lm
Luminous flux		
Emergency (DC) / mains		
Battery duration 1h	–	40% / 100%
Battery duration 3h	–	40% / 100%
Battery duration 8h	–	20% / 100%
Power consumption	5 VA	5 VA
Battery current input	12 mA	–
Battery duration		
Battery operation	–	1h / 3h / 8h
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Battery duration 1h	–	4,8V 0,8Ah 4,8V 0,8Ah + AkH
Battery duration 3h	–	4,8V 0,8Ah 4,8V 0,8Ah + AkH
Battery duration 8h	–	4,8V 0,8Ah 4,8V 0,8Ah + AkH
Temperature range	-10°C to +40°C	–
Non-maintained mode	–	0°C to +35°C
Maintained mode	–	-5°C to +30°C
optional		
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010	–
Self monitoring	–	SELF CHECK
Central monitoring	–	SAFELOG Line
Wireless monitoring	–	SAFELOG Wireless

* Optional accessory required

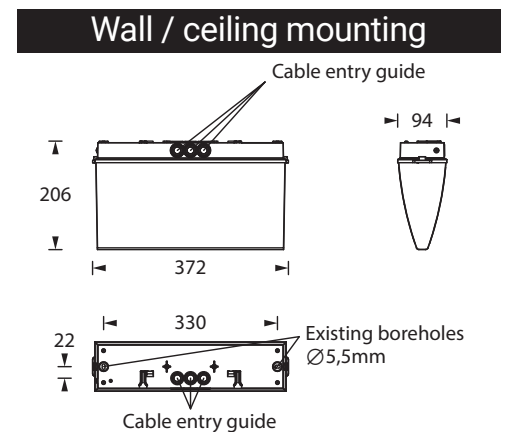

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Wire guard

Universal cover plate

Chain assembly set

Double pendulum set with long canopy

Central pendulum sets with long canopy

Central pendulum - Aluminum/Plastic

Central pendulum - Plastic

Wire sets with long canopy

Cable assembly set

Wall bracket

Pictograms