



VARIOLINE 170 UM

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.

Attractive, architectural design through combination of round and angular anodized aluminum profiles. Optionally usable as ceiling mounting or wall mounting by swiveling the upper part continuously.

The 10 mm light deflecting pane is illuminated with a 1.5 Watt LED-bar and is supplied with a pictogram set - arrow left/right/down/up/blind (Visibility distance 17 m).

Technical specifications

Luminaire type	Luminaires for central battery systems
Illuminant	1.5 W LED-bar
Visibility distance	17 m
Luminance	DIN 4844-1 > 500 cd/m ²
Connecting terminals	3 x 2.5 mm ² for double assignment
Colour	white aluminum (silver)
Material	Aluminum
Mounting type	Wall-/ceiling mounting
Dimensions (W x H x D)	DM 200 x 164 x 29 mm WM 200 x 131 x 63 mm
Pane dimensions (W x H x D)	190 x 121 x 10 mm
Protection class	IP40
Safety class	I
IK Safety class	IK03
Light current (mains)	190 lm
Power consumption	5 VA
Battery current input	12 mA
Voltage supply	230V 50/60Hz; 220V DC +25/-20%
Temperature range	-10°C to +40°C
optional	
Multi-switch and monitoring module	ELC MSÜ3 SET009 SET010

Pictogram-set - included in the delivery





Accessories

Wire guard
Universal cover plate
Cable surface mounting set



Ceiling mounting

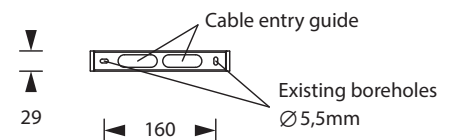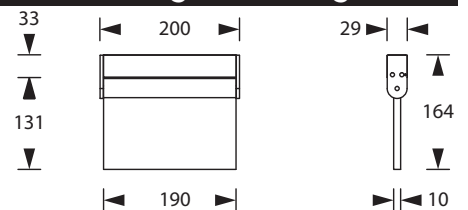

Wall mounting

