30m | IP40 | 1,5 W LED | 3W LED | Colour

# SMARTLINE A300 WM

MADE in GERMANY


**Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.**
Flat, architecturally attractive die-cast aluminum housing. Screwless, easy-to-use locking mechanism
Versions for wall mounting with 10 mm light deflecting pane and interchangeable pictograms. The luminaire price includes one pictogram foil set - arrow left/right/down/up/blind (Visibility distance 30 m).
The luminaire is available with a 1.5 Watt or 3 Watt LED-bar.




## Technical specifications

| **Luminaire type** | **Luminaires for central battery systems** | | **Self contained luminaires** | |
|---|---|---|---|---|
| Illuminant | 1.5 W LED-bar | 3 W LED-bar | 1.5 W LED-bar | 3 W LED-bar |
| Visibility distance | 30 m | | | |
| Luminance | DIN 4844-1 > 500 cd/m² | | | |
| Connecting terminals | 3 x 2.5 mm² for double assignment | | | |
| Colour | white | | | |
| Material | Aluminum die-cast | | | |
| Mounting type | Wall mounting | | | |
| Dimensions (W x H x D) | WM 350 x 246 x 37 mm | | | |
| Pane dimensions (W x H x D) | 324 x 187.5 x 10 mm | | | |
| Protection class | IP40 | | | |
| Safety class | I | | | |
| IK Safety class | IK03 | | | |
| Light current (mains) | 190 lm | 350 lm | 190 lm | 350 lm |
| Luminous flux Emergency (DC) / mains | | | | |
| Battery duration 1h | – | – | 40% / 100% | 20% / 100% |
| Battery duration 3h | – | – | 40% / 100% | 20% / 100% |
| Battery duration 8h | – | – | 20% / 100% | 10% / 100% |
| Power consumption | 5 VA | 6 VA | 5 VA | 6 VA |
| Battery current input | 12 mA | 19 mA | – | |
| Battery duration Battery operation | – | | 1h / 3h / 8h | |
| Voltage supply | 230V 50/60Hz; 220V DC +25/-20% | | 230V 50/60Hz | |
| NiMH-battery | | | | |
| Battery duration 1h | – | – | 4,8V 0,8Ah | 4,8V 0,8Ah |
| Battery duration 3h | – | – | 4,8V 0,8Ah | 4,8V 0,8Ah |
| Battery duration 8h | – | – | 4,8V 0,8Ah | 4,8V 0,8Ah |
| Temperature range | -10°C to +40°C | | – | |
| Non-maintained mode | – | | 0°C to +35°C | |
| Maintained mode | – | | -5°C to +30°C | |
| optional | | | | |
| Multi-switch and monitoring module | DALI ELC MSÜ3 SET009 SET010 | | – | |
| Self monitoring | – | | SELF CHECK | |
| Central monitoring | – | | SAFELOG Line | |
| Wireless monitoring | – | | SAFELOG Wireless | |

## Wall mounting

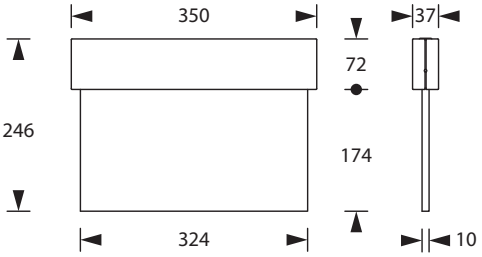

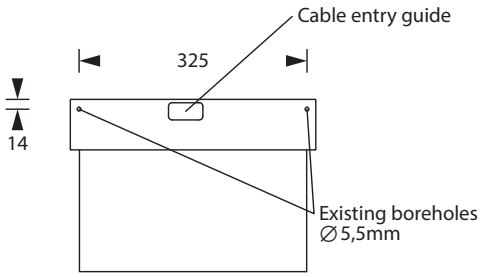


Technical changes reserved / 04.11.2026

## Pictogram-set - included in the delivery



## Optional pictograms (-sets)



## Accessories

| |
|---|
| Wire guard |
| Pictograms |