



S-LINE 300 DMS

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.

Extremely slim, attractive housing made of polycarbonate. Screwless, easy-to-use locking mechanism.

Version for disc cable suspension (cable 1.5m) as ceiling-mounted version. Optionally, the luminaire is available from the factory with a 2 x 5 m or a 2 x 10 m live cable. With optional recessed ceiling frame also available as recessed ceiling version.

The 10 mm light deflecting pane is illuminated with a 1.5 watt or 3 watt LED-bar and supplied with a pictogram set - arrow left/right/down/up/blind (Visibility distance 30 m).


Technical specifications

Luminaire type	Luminaires for central battery systems		Self contained luminaires	
Illuminant	1.5 W LED-bar	3 W LED-bar	1.5 W LED-bar	3 W LED-bar
Visibility distance	30 m			
Luminance	DIN 4844-1 > 500 cd/m²			
Connecting terminals	2 x 2.5 mm² for double assignment			
Colour	white / black			
Material	Polycarbonate			
Mounting type	Wall-/ceiling mounting (wire suspension)			
Additional mounting types*	Recessed mounting (wire suspension)			
Dimensions (W x H x D)	DMS 265 x 256 x 37 mm			
Pane dimensions (W x H x D)	324 x 187.5 x 10 mm			
Protection class	IP40			
Safety class	II			
IK Safety class	IK03			
Light current (mains)	190 lm	350 lm	190 lm	350 lm
Luminous flux				
Emergency (DC) / mains				
Battery duration 1h	–	–	40% / 100%	20% / 100%
Battery duration 3h	–	–	40% / 100%	20% / 100%
Battery duration 8h	–	–	20% / 100%	10% / 100%
Power consumption	5 VA	6 VA	5 VA	6 VA
Battery current input	12 mA	19 mA	–	
Battery duration	–		1h / 3h / 8h	
Battery operation				
Voltage supply	230V 50/60Hz; 220V DC +25/-20%		230V 50/60Hz	
NiMH-battery				
Battery duration 1h	–	–	4,8V 0,8Ah	4,8V 0,8Ah
Battery duration 3h	–	–	4,8V 0,8Ah	4,8V 0,8Ah
Battery duration 8h	–	–	4,8V 0,8Ah	4,8V 0,8Ah
Temperature range	-10°C to +40°C		–	
Non-maintained mode	–		0°C to +35°C	
Maintained mode	–		-5°C to +30°C	
optional				
Multi-switch and monitoring module	ELC MSÜ3 SET009 SET010		–	
Self monitoring	–		SELF CHECK	
Central monitoring	–		SAFELOG Line	
Wireless monitoring	–		SAFELOG Wireless	

* Optional accessory required



Wall-/ceiling mounting (wire suspension)

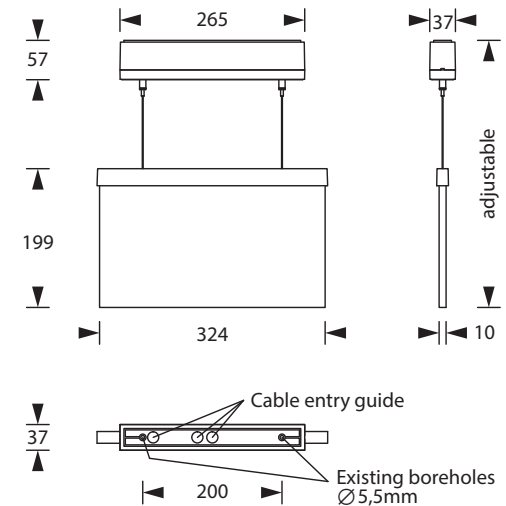

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Cement assembly box
Recessed ceiling frame - clampable
Universal cover plate
Pictograms