

INDEPENDENCE 200 DM

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.

Flat, architectural high quality stainless steel case for ceiling mounting with shapely, slim enclosure of light guide pane.

The luminaire price includes one pictogram set - arrow left/right/down/up/blind (Visibility distance 23 m).


The 15 mm light-deflecting pane is supplied with a 2 Watt LED-bar.

Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	2 W LED-bar	2 W LED-bar
Visibility distance	23 m	
Luminance	DIN 4844-1 > 500 cd/m ²	
Connecting terminals	3 x 2.5 mm ² for double assignment	
Colour	Stainless steel brushed	
Material	Stainless steel (V4A)	
Mounting type	Ceiling mounting	
Dimensions (W x H x D)	DM 255 x 209 x 56 mm	
Pane dimensions (W x H x D)	251.4 x 146.6 x 15 mm	
Protection class	IP40	
Safety class	I	
IK Safety class	IK03	
Light current (mains)	260 lm	260 lm
Luminous flux		
Emergency (DC) / mains		
Battery duration 1h	–	30% / 100%
Battery duration 3h	–	30% / 100%
Battery duration 8h	–	15% / 100%
Power consumption	5.5 VA	5.5 VA
Battery current input	14 mA	–
Battery duration	–	1h / 3h / 8h
Battery operation		
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Battery duration 1h	–	4,8V 0,8Ah
Battery duration 3h	–	4,8V 0,8Ah
Battery duration 8h	–	4,8V 0,8Ah
Temperature range	-10°C to +40°C	–
Non-maintained mode	–	0°C to +35°C
Maintained mode	–	-5°C to +30°C
optional		
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010/025	–
Self monitoring	–	SELF CHECK
Central monitoring	–	SAFELOG Line
Wireless monitoring	–	SAFELOG Wireless



Ceiling mounting

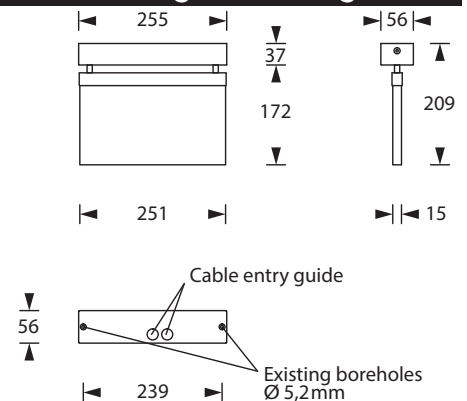

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Pictograms