



VARIOLINE 170 UM

Exit luminaire in compliance with EN 60598-1/2-22 and EN 1838.

Attractive, architectural design through combination of round and angular aluminum profiles. Optionally usable as ceiling mounting or wall mounting by swiveling the upper part continuously.

The 10 mm light deflecting pane is illuminated with a 1,5 Watt LED-bar and is supplied with a pictogram set - arrow left/right/down/up/blind (Visibility distance 17 m).

Technical specifications

| Luminaire type | Luminaires for central battery systems |
|------------------------------------|-----------------------------------------------|
| Illuminant | 1.5 W LED-bar |
| Visibility distance | 17 m |
| Connecting terminals | 3 x 2.5 mm ² for double assignment |
| Colour | white aluminum (silver) |
| Material | Aluminum |
| Mounting type | Wall-/ceiling mounting |
| Dimensions (W x H x D) | DM 200 x 164 x 29 mm WM 200 x 131 x 63 mm |
| Pane dimensions (W x H x D) | 190 x 121 x 10 mm |
| Protection class | IP40 |
| Safety class | I |
| IK Safety class | IK03 |
| Light current (mains) | 190 lm |
| Power consumption | 5 VA |
| Battery current input | 12 mA |
| Voltage supply | 230V 50/60Hz; 220V DC +25/-20% |
| Temperature range | -10°C to +40°C |
| optional | |
| Multi-switch and monitoring module | ELC MSÜ3 SET009 SET010 |

Pictogram-set - included in the delivery





Accessories

| |
|----------------------------|
| Wire guard |
| Universal cover plate |
| Cable surface mounting set |



Ceiling mounting

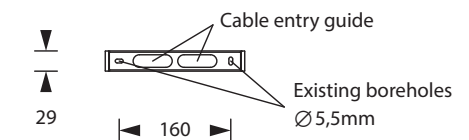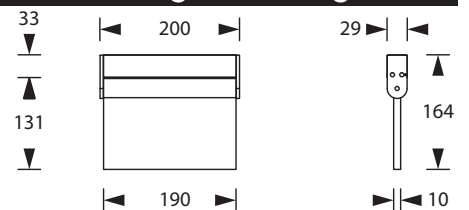

Wall mounting

