

L-PLAST 250-T UM

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.

Polycarbonate housing with transparent luminaire cover for insertable pictograms on both sides for wall or ceiling mounting. Possibility for recessed ceiling mounting with optional recessed ceiling frame. The luminaire price includes one pictogramfoil set - arrow left/right/down/up/blind (Visibility distance 22 m). The luminaire is supplied with a 1 Watt LED-bar.


Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	1 W LED-bar	1 W LED-bar
Visibility distance	22 m	
Luminance	DIN 4844-1 > 500 cd/m ²	
Connecting terminals	2 x 2.5 mm ² for double assignment	
Colour	white	
Material	Polycarbonate (light cover clear)	
Mounting type	Wall-/ceiling mounting	
Additional mounting types*	Recessed mounting, Ceiling mounting (wire suspension), Pendulum mounting	
Dimensions (W x H x D)	WM/DM 239 x 164 x 59 mm DE 282 x 35 x 88 mm	
Protection class	IP54	
Safety class	II	
IK Safety class	IK03	
Light current (mains)	130 lm	130 lm
Luminous flux		
Emergency (DC) / mains		
Battery duration 1h	–	50% / 100%
Battery duration 3h	–	50% / 100%
Battery duration 8h	–	25% / 100%
Power consumption	4.5 VA	4.5 VA
Battery current input	11 mA	–
Battery duration	–	1h / 3h / 8h
Battery operation		
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Battery duration 1h	–	4,8V 0,8Ah
Battery duration 3h	–	4,8V 0,8Ah
Battery duration 8h	–	4,8V 0,8Ah
Temperature range	-10°C to +40°C	–
Non-maintained mode	–	0°C to +35°C
Maintained mode	–	-5°C to +30°C
optional		
Multi-switch and monitoring module	ELC MSÜ3 SET009 SET010	–
Self monitoring	–	SELF CHECK
Central monitoring	–	SAFELOG Line
Wireless monitoring	–	SAFELOG Wireless


* Optional accessory required



Ceiling mounting

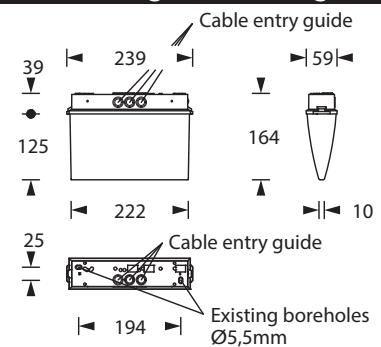

Wall mounting

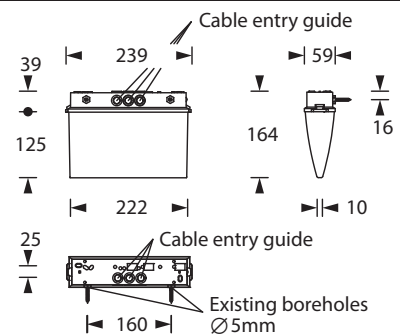

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Wire guard
Recessed ceiling frame - clampable
Chain assembly set
Central pendulum - Plastic
Cable assembly set
Pictograms