



LBOARD A200 WM/DM

Exit luminaire in compliance with EN 60598-1/2-22 and EN 1838.

Housing made from steel sheeting, powder coated in white. Available as wall- and ceiling-mounted version with 10 mm thick light-deflecting pane and exchangeable pictograms.

The luminaire price includes per luminaire one pictogramfoil set - arrow left/right/down/up/blind (Visibility distance 23 m).


Optionally available with 1 or 2 Watt LED-bar.




Technical specifications

Luminaire type	Luminaires for central battery systems		Self contained luminaires	
	1 W LED-bar	2 W LED-bar	1 W LED-bar	2 W LED-bar
Visibility distance	23 m			
Connecting terminals	3 x 2.5 mm ² for double assignment			
Colour	white			
Material	Sheet steel			
Mounting type	Wall-/ceiling mounting			
Dimensions (W x H x D)	WM/DM 274 x 213 x 46 mm			
Pane dimensions (W x H x D)	248 x 148 x 10 mm			
Protection class	IP40			
Safety class	I			
IK Safety class	IK03			
Light current (mains)	130 lm	260 lm	130 lm	260 lm
Luminous flux				
Emergency (DC) / mains				
Rated operating time 1h	-	-	50% / 100%	30% / 100%
Rated operating time 3h	-	-	50% / 100%	30% / 100%
Rated operating time 8h	-	-	25% / 100%	15% / 100%
Power consumption	4.5 VA	5.5 VA	4.5 VA	5.5 VA
Battery current input	11 mA	14 mA	-	
Battery duration	-		1h / 3h / 8h	
Battery operation				
Voltage supply	230V 50/60Hz; 220V DC +25/-20%		230V 50/60Hz	
NiMH-battery				
Rated operating time 1h	-	-	4,8V 0,8Ah	4,8V 0,8Ah
Rated operating time 3h	-	-	4,8V 0,8Ah	4,8V 0,8Ah
Rated operating time 8h	-	-	4,8V 0,8Ah	4,8V 0,8Ah
Temperature range	-10°C to +40°C		-	
Non-maintained mode	-		0°C to +35°C	
Maintained mode	-		-5°C to +30°C	
optional				
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010		-	
Self monitoring	-		SELF CHECK	
Central monitoring	-		SAFELOG Line	
Wireless monitoring	-		SAFELOG Wireless	

Ceiling mounting

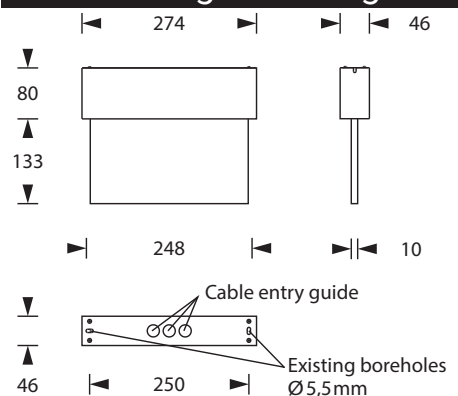

Wall mounting

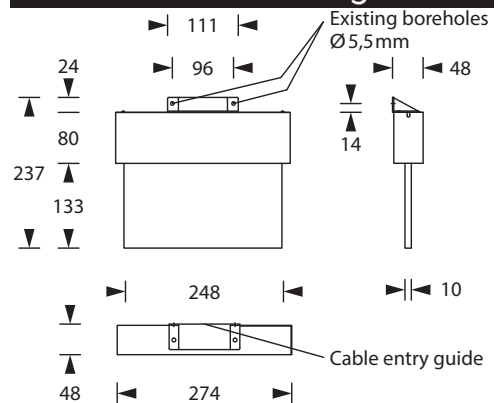

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Wire guard

Cable surface mounting set

Chain assembly set

Double pendulum set with long canopy

Central pendulum sets with long canopy

Central pendulum - Aluminum/Plastic

Central pendulum - Plastic

Wire sets with long canopy

Cable assembly set

Wall bracket

Wall adapter

Pictograms