



S-LINE 200 3P

Exit luminaire in compliance with EN 60598-1/2-22 and EN 1838.

Extremely slim, attractive housing made of polycarbonate including a Stucci adapter for mounting in compatible 3-phase tracks. Screwless, easy-to-use locking mechanism.


The 10 mm light deflecting pane is illuminated with a 2 Watt LED-bar and supplied with a pictogram set - arrow left/right/down/up/blind (Visibility distance 23 m).



Technical specifications

Luminaire type	Self contained luminaires
Illuminant	2 W LED-bar
Visibility distance	23 m
Colour	white / black
Material	Polycarbonate
Mounting type	Track mounting
Dimensions (W x H x D)	SM 265 x 247 x 37 mm
Pane dimensions (W x H x D)	248 x 148 x 10 mm
Protection class	IP40
Safety class	see gear tray
IK Safety class	IK03
Light current (mains)	260 lm
Luminous flux	
Emergency (DC) / mains	
Rated operating time 1h	30% / 100%
Rated operating time 3h	30% / 100%
Rated operating time 8h	15% / 100%
Power consumption	5.5 VA
Battery duration	1h / 3h / 8h
Battery operation	
Voltage supply	230V 50/60Hz
NiMH-battery	
Rated operating time 1h	4,8V 0,8Ah
Rated operating time 3h	4,8V 0,8Ah
Rated operating time 8h	4,8V 0,8Ah
Temperature range	
Non-maintained mode	0°C to +35°C
Maintained mode	-5°C to +30°C
optional	
Self monitoring	SELF CHECK
Wireless monitoring	SAFELOG Wireless

Track mounting

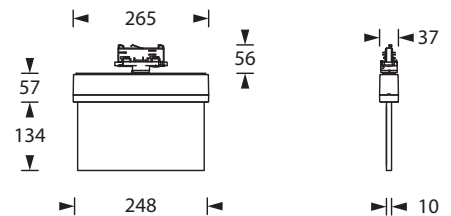

Pictogram-set - included in the delivery



Accessories

Pictograms

Use for 3-phase tracks

The product is currently tested for use in the following tracks:

Manufacturer	Manufacturer Art. No.	Type	Remarks
Eutrac	99-759	3-phase track	compatible
Iguzzini	K777	3-phase track	compatible
Ivela	7601	3-phase track	compatible
Lumisys Unipro	A75	3-phase track	compatible
Nordic Global	GA100	3-phase track	compatible
Nordic Global	GA69	3-phase track	compatible
Nordic Global	XTSA 68	3-phase track	compatible
Powergear	Pro-0440	3-phase track	compatible
Powergear	Pro-0440-S	3-phase track	compatible
Reggiani	2270	3-phase track	compatible
Stucchi	9000-.../...-ST	3-phase track	compatible
Targetti	N55...	3-phase track	compatible
Zumtobel	T 12076	3-phase track	compatible