



LBOARD A300 WM/DM

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.

Housing made from steel sheeting, including a 10 mm thick light-deflecting pane and exchangeable pictograms, powder coated in white. The luminaire will be delivered as universal construction and can be used for ceiling or wall parallel mounting by using an optional wall adapter.

The luminaire price includes per luminaire one pictogramfoil set - arrow left/right/down/up/blind (Visibility distance 30 m).

Optionally available with 1.5 or 3 Watt LED-bar.


Technical specifications

Luminaire type	Luminaires for central battery systems		Self contained luminaires	
	1.5 W LED-bar	3 W LED-bar	1.5 W LED-bar	3 W LED-bar
Illuminant				
Visibility distance	30 m			
Luminance	DIN 4844-1 > 500 cd/m²			
Connecting terminals	3 x 2.5 mm² for double assignment			
Colour	white			
Material	Sheet steel			
Mounting type	Wall-/ceiling mounting			
Additional mounting types*	wall bracket mounting, Ceiling mounting (wire suspension), Pendulum mounting			
Dimensions (W x H x D)	WM/DM 350 x 253 x 46 mm			
Pane dimensions (W x H x D)	324 x 187.5 x 10 mm			
Protection class	IP40			
Safety class	I			
IK Safety class	IK03			
Light current (mains)	190 lm	350 lm	190 lm	350 lm
Luminous flux				
Emergency (DC) / mains				
Battery duration 1h	–	–	40% / 100%	20% / 100%
Battery duration 3h	–	–	40% / 100%	20% / 100%
Battery duration 8h	–	–	20% / 100%	10% / 100%
Power consumption	5 VA	6 VA	5 VA	6 VA
Battery current input	12 mA	19 mA	–	
Battery duration	–		1h / 3h / 8h	
Battery operation	–		1h / 3h / 8h	
Voltage supply	230V 50/60Hz; 220V DC +25/-20%		230V 50/60Hz	
NiMH-battery				
Battery duration 1h	–	–	4,8V 0,8Ah	4,8V 0,8Ah
Battery duration 3h	–	–	4,8V 0,8Ah	4,8V 0,8Ah
Battery duration 8h	–	–	4,8V 0,8Ah	4,8V 0,8Ah
Temperature range	-10°C to +40°C		–	
Non-maintained mode	–		0°C to +35°C	
Maintained mode	–		-5°C to +30°C	
optional				
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010/025		–	
Self monitoring	–		SELF CHECK	
Central monitoring	–		SAFELOG Line	
Wireless monitoring	–		SAFELOG Wireless	


* Optional accessory required



Ceiling mounting

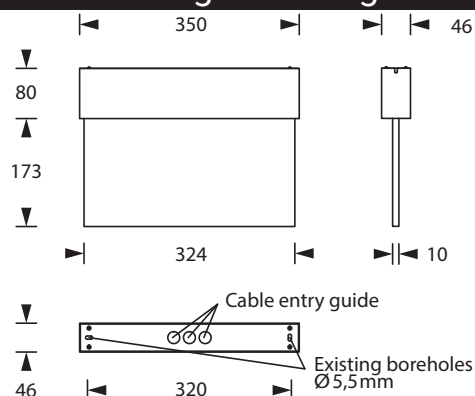

Wall mounting

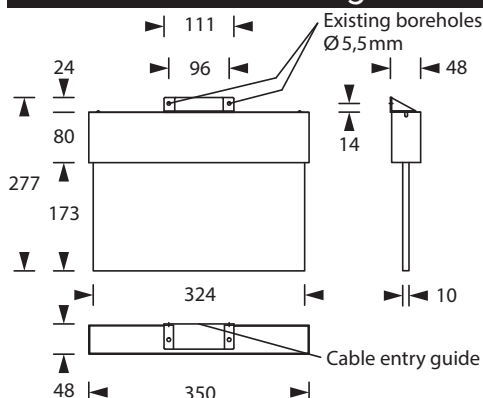

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Wire guard
Cable surface mounting set
Chain assembly set
Double pendulum set with long canopy
Central pendulum sets with long canopy
Central pendulum - Aluminum/Plastic
Central pendulum - Plastic
Wire sets with long canopy
Cable assembly set
Wall bracket
Wall adapter
Pictograms