



LBOX 300 DM

Exit luminaire in compliance with EN 60598-1/2-22 and EN 1838.

Housing made from steel sheeting, powder coated in white.


Ceiling mounted version with light emission windows on the underside.

The luminaire price includes two exit sign panes (Visibility distance 30 m) per luminaire, which must be ordered separately.


The luminaire is supplied with a 2 Watt LED-bar.

Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	3 W LED-bar	3 W LED-bar
Visibility distance	30 m	
Connecting terminals	3 x 2.5 mm ² for double assignment	
Colour	white	
Material	Sheet steel	
Mounting type	Ceiling mounting	
Dimensions (W x H x D)	DM 334 x 177 x 60 mm	
Protection class	IP40	
Safety class	I	
IK Safety class	IK03	
Light current (mains)	350 lm	350 lm
Luminous flux		
Emergency (DC) / mains		
Rated operating time 1h	-	20% / 100%
Rated operating time 3h	-	20% / 100%
Rated operating time 8h	-	10% / 100%
Power consumption	6 VA	6 VA
Battery current input	19 mA	-
Battery duration	-	1h / 3h / 8h
Battery operation		
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Rated operating time 1h	-	4,8V 0,8Ah
Rated operating time 3h	-	4,8V 0,8Ah
Rated operating time 8h	-	4,8V 0,8Ah
Temperature range	-10°C to +40°C	-
Non-maintained mode	-	0°C to +35°C
Maintained mode	-	-5°C to +30°C
optional		
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG Line
Wireless monitoring	-	SAFELOG Wireless

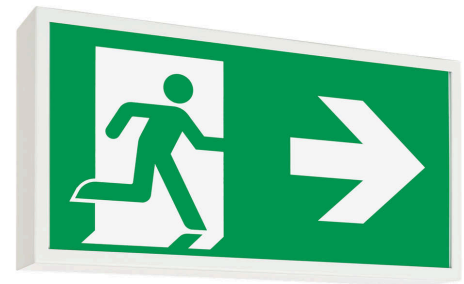

Ceiling mounting

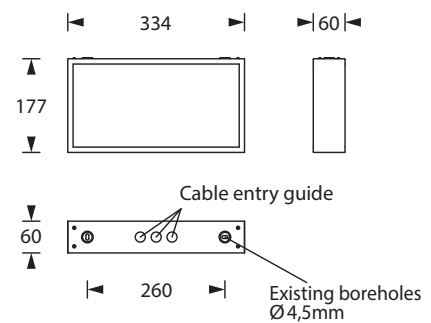

Pictograms to choose from - please specify when ordering



Accessories

Universal cover plate

Cable surface mounting set

Chain assembly set

Double pendulum set with long canopy

Central pendulum sets with long canopy

Central pendulum - Aluminum/Plastic

Central pendulum - Plastic

Wire sets with long canopy

Cable assembly set

Wall bracket

Pictograms