



BEAM 140-PC A-F

Safety luminaire in compliance with EN IEC 60598-1/2-22 and EN 1838.

Compact polycarbonate housing in an appealing design with round hollow of the surface. Easy to handle locking mechanism without screws. Version for ceiling mounting with one high-power LED (switching type: non-maintained mode) and cast acrylic optics for area illumination by circular light deflection characteristic. For unprotected outdoor installation, the luminaire can be optionally equipped with a pressure equalization valve to be installed on site.


Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	3 W LED	3 W LED
Connecting terminals	2 x 2.5 mm ² for double assignment	
Colour	white	
Material	Polycarbonate	
Mounting type	Ceiling mounting	
Additional mounting types*	Ceiling mounting (wire suspension)	
Dimensions (Ø x H)	DM 145 x 43 mm	
Protection class	IP65	
Safety class	II	
IK Safety class	IK03	
Light current (mains)	280 lm	120 lm
Light current (emergency)		
Battery duration 1h	–	280 lm
Battery duration 3h	–	280 lm
Battery duration 8h	–	120 lm
Luminous flux		
Emergency (DC) / mains		
Battery duration 1h	–	100% / 45%
Battery duration 3h	–	100% / 45%
Battery duration 8h	–	45% / 45%
Power consumption	6 VA	5 VA
Battery current input	15 mA	–
Battery duration	–	1h / 3h / 8h
Battery operation		
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Battery duration 1h	–	4,8V 2,0Ah 4,8V 2,0Ah + AkH
Battery duration 3h	–	4,8V 2,0Ah 4,8V 2,0Ah + AkH
Battery duration 8h	–	4,8V 2,0Ah 4,8V 2,0Ah + AkH
Temperature range	-10°C to +40°C	–
Non-maintained mode	–	0°C to +35°C
Maintained mode	–	-5°C to +30°C
optional		
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010	–
Self monitoring	–	SELF CHECK
Central monitoring	–	SAFELOG Line
Wireless monitoring	–	SAFELOG Wireless

* Optional accessory required



Ceiling mounting

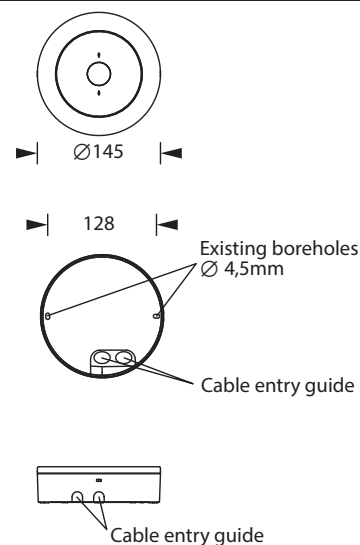


Accessories

Wire guard

Pressure compensation valve

Cable assembly set

Lighting data and tables of luminaire distances ($E = 1,25 \text{ lx}$)



Ceiling mounting

Luminaires for central battery systems wide area optics

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED		Luminous flux emergency / mains: 280lm											
h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50	8.00	
a	9.90	11.10	12.20	13.30	14.30	14.80	14.50	14.30	13.60	12.70	11.00	9.50	
b	4.30	4.90	5.40	5.80	5.20	4.20	3.40	2.40	1.20	1.00	1.00	1.00	
c	9.90	11.10	12.20	13.30	14.30	14.80	14.50	14.30	13.60	12.70	11.00	9.50	
d	4.30	4.90	5.40	5.80	5.20	4.20	3.40	2.40	1.20	1.00	1.00	1.00	

Self contained luminaires wide area optics

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED		Luminous flux emergency / mains: 280lm/120lm – Battery duration: 1h											
h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50	8.00	
a	9.90	11.10	12.20	13.30	14.30	14.80	14.50	14.30	13.60	12.70	11.00	9.50	
b	4.30	4.90	5.40	5.80	5.20	4.20	3.40	2.40	1.20	1.00	1.00	1.00	
c	9.90	11.10	12.20	13.30	14.30	14.80	14.50	14.30	13.60	12.70	11.00	9.50	
d	4.30	4.90	5.40	5.80	5.20	4.20	3.40	2.40	1.20	1.00	1.00	1.00	

Self contained luminaires wide area optics

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED		Luminous flux emergency / mains: 280lm/120lm – Battery duration: 3h											
h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50	8.00	
a	9.90	11.10	12.20	13.30	14.30	14.80	14.50	14.30	13.60	12.70	11.00	9.50	
b	4.30	4.90	5.40	5.80	5.20	4.20	3.40	2.40	1.20	1.00	1.00	1.00	
c	9.90	11.10	12.20	13.30	14.30	14.80	14.50	14.30	13.60	12.70	11.00	9.50	
d	4.30	4.90	5.40	5.80	5.20	4.20	3.40	2.40	1.20	1.00	1.00	1.00	

Self contained luminaires wide area optics

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED		Luminous flux emergency / mains: 120lm/120lm – Battery duration: 8h											
h	2.50	3.00	3.50	4.00	4.50	5.00							
a	8.50	9.50	9.50	9.30	8.60	7.00							
b	3.70	3.20	2.40	1.40	1.40	1.00							
c	8.50	9.50	9.50	9.30	8.60	7.00							
d	3.70	3.20	2.40	1.40	1.40	1.00							