

Colour



5lx-optics accessories-set

1 x optics for retrofitting of a 1 x 3W POWER LED safety luminaire for special demands according to EN 1838 in regards to illumination of firefighting equipment and safety devices like fire alarm, fire extinguishers and first aid devices with 5lx.

Due to its slanted optic, the luminaire can be mounted in a distance up to 1,5 m away from the object which has to be illuminated.

Very quick retrofitting, as the optics is only clipped in.



Technical specifications and order information



5lx-optics (1 pc.) 15 mm accessories-set

Colour	white
Material	Polycarbonate
Dimensions (W x H x D)	22.6 x 14 x 16 mm
Dimensions (Ø)	16 mm


Order number 551243

Suitable for following luminaires:

A-STAR EQ-F/R	BEAM 130-AL A-F/R	L-STAR ED-R
A-STAR ER-F/R	BEAM 130-PC A-F	L-STAR EQ-F
BEAM 125-AL A-F/R	BEAM 130-PC A-R	L-STAR EQ-R
BEAM 125-PC A-F	INSTAR EQ-F/R	L-STAR ER-F
BEAM 125-PC A-R	INSTAR ER-F/R	L-STAR ER-R
BEAM 125R-AL A-F/R	L-STAR A-F	SPOT-LIGHT 80-AL ER-F/R
BEAM 125R-PC A-F	L-STAR A-R	SPOT-LIGHT 80-PC ER-F
BEAM 125R-PC A-R	L-STAR ED-F	SPOT-LIGHT 80-PC ER-R



Lighting datas and graphics of luminaire distances (E = 5,00 lx)

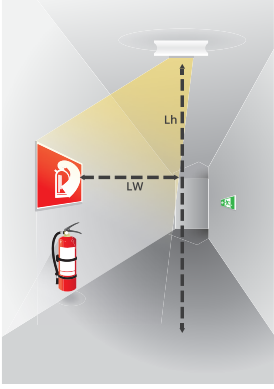

Luminous flux: 280 lm

