



S-LINE 300 UM

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.

Very slim, attractive housing made of polycarbonate. Screwless, easy-to-use locking mechanism.

Can be used for wall or ceiling mounting due pre-stamped mounting and cable entry openings from top or rear. For wall mounting, an unobtrusive wall adapter with click system is included. With optional ceiling mounting frame also possible as recessed version.

The 10 mm light deflecting pane is illuminated with a 1.5 Watt or 3 Watt LED-bar and a pictogram set - arrow left/right/down/up/blind (Visibility distance 30 m) is included.


Technical specifications

Luminaire type	Luminaires for central battery systems		Self contained luminaires		
Illuminant	1.5 W LED-bar	3 W LED-bar	1.5 W LED-bar	3 W LED-bar	
Visibility distance	30 m				
Luminance	DIN 4844-1 > 500 cd/m²				
Connecting terminals	2 x 2.5 mm² for double assignment				
Colour	white / black				
Material	Polycarbonate				
Mounting type	Wall-/ceiling mounting				
Additional mounting types*	wall bracket mounting, Ceiling mounting (wire suspension), Recessed mounting, Pendulum mounting				
Dimensions (W x H x D)	DM 341 x 230 x 37 mm WM 341 x 233 x 41 mm				
Pane dimensions (W x H x D)	324 x 187.5 x 10 mm				
Protection class	IP43				
Safety class	II				
IK Safety class	IK03				
Light current (mains)	190 lm	350 lm	190 lm	350 lm	
Luminous flux	—				
Emergency (DC) / mains					
Battery duration 1h			—	—	40% / 100% 20% / 100%
Battery duration 3h			—	—	40% / 100% 20% / 100%
Battery duration 8h	—	—	20% / 100% 10% / 100%		
Power consumption	5 VA	6 VA	5 VA	6 VA	
Battery current input	12 mA	19 mA	—		
Battery duration	—				
Battery operation			1h / 3h / 8h		
Voltage supply	230V 50/60Hz; 220V DC +25/-20%		230V 50/60Hz		
NiMH-battery	—				
Battery duration 1h			—	—	4,8V 0,8Ah 4,8V 0,8Ah
Battery duration 3h			—	—	4,8V 0,8Ah 4,8V 0,8Ah
Battery duration 8h			—	—	4,8V 0,8Ah 4,8V 0,8Ah
Temperature range	-10°C to +40°C		—		
Non-maintained mode	—		0°C to +35°C		
Maintained mode	—		-5°C to +30°C		
optional	ELC MSÜ3 SET009 SET010				
Multi-switch and monitoring module			—		
Self monitoring			SELF CHECK		
Central monitoring			SAFELOG Line		
Wireless monitoring			SAFELOG Wireless		


* Optional accessory required



Ceiling mounting

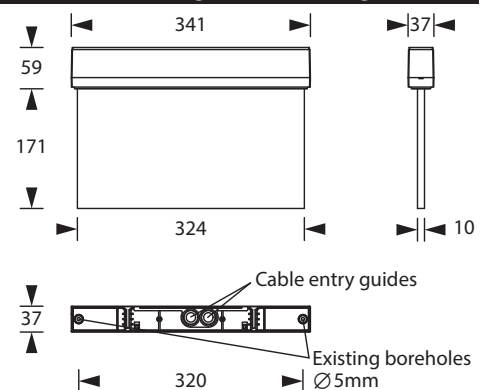

Wall mounting

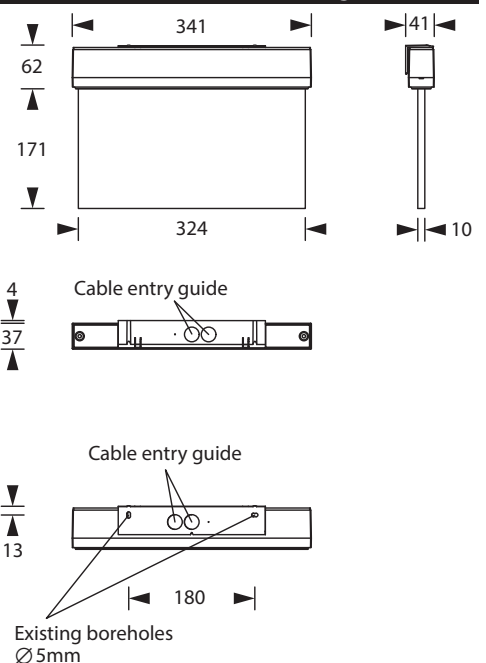

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Wire guard
Cement assembly box
Recessed ceiling frame - clampable
Universal cover plate
Chain assembly set
Central pendulum - Plastic
Cable assembly set
Wall bracket
Pictograms