



SMARTLINE A300 DM

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.


Flat, architecturally attractive die-cast aluminum housing. Screwless, easy-to-use locking mechanism

Versions for ceiling mounting with 10 mm light deflecting pane and replaceable pictograms. The luminaire price includes one pictogram foil set - arrow left/right/down/up/blind (Visibility distance [!- C:patr7816506926379@This@class18521058581515
The luminaire is available with a 1.5 Watt or 3 Watt LED-bar.

Technical specifications

Luminaire type	Luminaires for central battery systems		Self contained luminaires	
Illuminant	1.5 W LED-bar	3 W LED-bar	1.5 W LED-bar	3 W LED-bar
Visibility distance	30 m			
Luminance	DIN 4844-1 > 500 cd/m²			
Connecting terminals	3 x 2.5 mm² for double assignment			
Colour	white			
Material	Aluminum die-cast			
Mounting type	Ceiling mounting			
Additional mounting types*	wall bracket mounting, Ceiling mounting (wire suspension), Pendulum mounting			
Dimensions (W x H x D)	DM 350 x 246 x 37 mm			
Pane dimensions (W x H x D)	324 x 187.5 x 10 mm			
Protection class	IP40			
Safety class	I			
IK Safety class	IK03			
Light current (mains)	190 lm	350 lm	190 lm	350 lm
Luminous flux				
Emergency (DC) / mains				
Battery duration 1h	–	–	40% / 100%	20% / 100%
Battery duration 3h	–	–	40% / 100%	20% / 100%
Battery duration 8h	–	–	20% / 100%	10% / 100%
Power consumption	5 VA	6 VA	5 VA	6 VA
Battery current input	12 mA	19 mA	–	
Battery duration	–		1h / 3h / 8h	
Battery operation				
Voltage supply	230V 50/60Hz; 220V DC +25/-20%		230V 50/60Hz	
NiMH-battery				
Battery duration 1h	–	–	4,8V 0,8Ah	4,8V 0,8Ah
Battery duration 3h	–	–	4,8V 0,8Ah	4,8V 0,8Ah
Battery duration 8h	–	–	4,8V 0,8Ah	4,8V 0,8Ah
Temperature range	-10°C to +40°C		–	
Non-maintained mode	–		0°C to +35°C	
Maintained mode	–		-5°C to +30°C	
optional				
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010		–	
Self monitoring	–		SELF CHECK	
Central monitoring	–		SAFELOG Line	
Wireless monitoring	–		SAFELOG Wireless	

* Optional accessory required

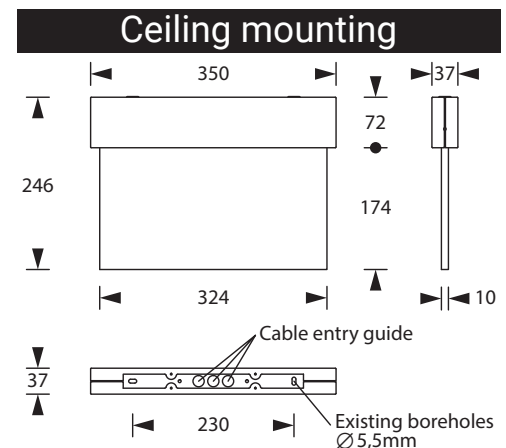

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Universal cover plate
Cable surface mounting set
Chain assembly set
Double pendulum set with long canopy
Central pendulum sets with long canopy
Central pendulum - Aluminum/Plastic
Central pendulum - Plastic
Wire sets with long canopy
Cable assembly set
Wall bracket
Pictograms