



Wireless Analyser

The SAFELOG Wireless Analyzer is a service tool that can be used to measure the signal strength of wireless consumers. It receives all wireless signals in its direct environment and graphically displays the result on a PC / tablet.

You can use the analyzer and the installed software to display the individual consumers, sort them by field strength, search for the hardware BUS address and filter individual consumers.

In addition, the consumers can be added to or removed from a wireless network and the service functions of the consumers can be managed.



Technical specifications and order information


SAFELOG WIRELESS ANALYZER

Frequency range	863 – 870 MHz (SRD Band)
Communication interface	USB 2.0 Hi-Speed / Full Speed
Ambient temperature	-5°C to +35°C
Storage temperature	0°C to +30°C
Protection class	IP20

Order number 910024

Suitable for following systems:

SAFELOG TOUCH WIRELESS SAFELOG mini

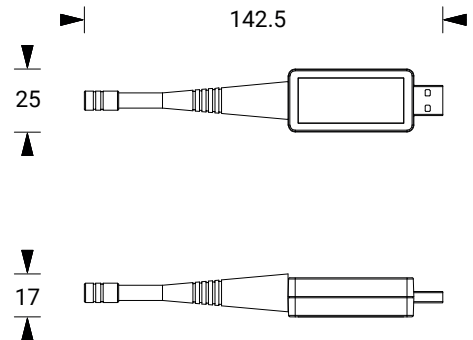

Main features

- Level meter of all consumers in the receiving environment of the analyzer
- Network functions
 - Manage consumers in a system
 - Use of service functions
- Service functions
 - Request of consumer status
 - Switch operating mode
 - Function test / duration test
 - Switching the luminaire on / off
 - Start blinking / stop blinking

System requirements

- Operating system: at least Windows 7
- Required software: Net Framework from version 4.0

Scope of delivery

- Wireless Analyzer
- USB stick incl. software and operation manual
- Quick start guide