



VARIOLINE 170 DMS

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.

Attractive, architectural design by combination of round and angular anodized aluminum profiles. Container for ceiling mounting with rope suspension (rope 1.5m) for the pane unit. Optionally, the luminaire is available from the factory with a 2 x 5 m or a 2 x 10 m conducting cable.


The 10 mm light deflecting pane is illuminated with a 1.5 Watt LED-bar and supplied with a pictogram set - arrow left/right/down/up/blind (Visibility distance 17 m).

Technical specifications

Luminaire type	Luminaires for central battery systems
Illuminant	1.5 W LED-bar
Visibility distance	17 m
Luminance	DIN 4844-1 > 500 cd/m ²
Connecting terminals	3 x 2.5 mm ² for double assignment
Colour	white aluminum (silver)
Material	Aluminum
Mounting type	Ceiling mounting (wire suspension)
Dimensions (W x H x D)	DMS 200 x 163 x 29 mm
Pane dimensions (W x H x D)	190 x 121 x 10 mm
Protection class	IP40
Safety class	I
IK Safety class	IK03
Light current (mains)	190 lm
Power consumption	5 VA
Battery current input	12 mA
Voltage supply	230V 50/60Hz; 220V DC +25/-20%
Temperature range	-10°C to +40°C
optional	
Multi-switch and monitoring module	ELC MSÜ3 SET009 SET010



Ceiling mounting (wire suspension)

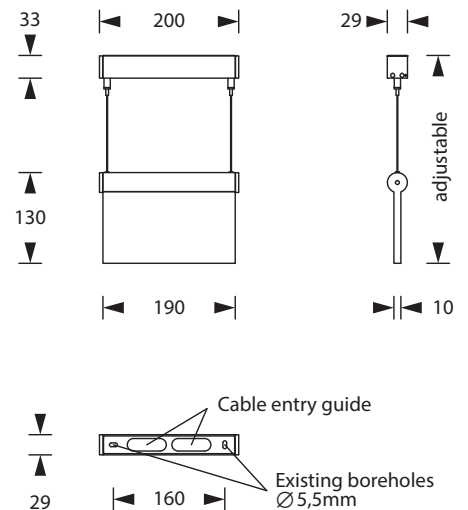

Pictogram-set - included in the delivery



Accessories

Universal cover plate