



CUBE H-600

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.

Modern, cubic luminaire housing made of anodized aluminum frame and folding upper part made of polycarbonate. The luminaire comes with three printed pictogram panes - arrow left/right/down (Visibility distance 60 m) and one opal pane. The product is of very rugged construction and quick to install.

The luminaire is equipped with 8 x 3,5 Watt (central power supply) or 4 x 3,5 Watt (self contained version) high-power LED technology.

The self contained version is not in line with DIN 4844-1.


Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	8 x 3.5 W LED-bar	4 x 3.5 W LED-bar
Visibility distance	60 m	
Luminance	DIN 4844-1 > 500 cd/m ²	–
Connecting terminals	2 x 2.5 mm ² for double assignment	
Colour	white aluminum (silver)	
Material	Polycarbonate/Aluminum	
Mounting type	Ceiling mounting	
Additional mounting types*	Ceiling mounting (wire suspension)	
Dimensions (W x H x D)	DM 655 x 385 x 655 mm	
Protection class	IP54	
Safety class	II	
IK Safety class	IK03	
Light current (mains)	4000 lm	950 lm
Luminous flux		
Emergency (DC) / mains		
Battery duration 1h	–	35% / 100%
Battery duration 3h	–	35% / 100%
Battery duration 8h	–	35% / 100%
Power consumption	35 VA	18 VA
Battery current input	145 mA	–
Battery duration	–	1h / 3h / 8h
Battery operation		
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Battery duration 1h	–	4,8V 2,0Ah
Battery duration 3h	–	4,8V 2,0Ah
Battery duration 8h	–	4,8V 4,2Ah
Temperature range	-10°C to +40°C	–
Non-maintained mode	–	0°C to +35°C
Maintained mode	–	-5°C to +30°C
optional		
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010/025	–
Self monitoring	–	SELF CHECK
Central monitoring	–	SAFELOG Line
Wireless monitoring	–	SAFELOG Wireless

* Optional accessory required



Ceiling mounting

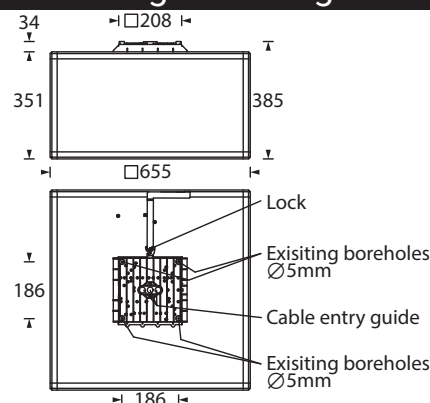

Pictogram-set - included in the delivery



Accessories

Chain assembly set

Cable assembly set

Pictograms
