




S-LINE 200 BEL 3P

Safety luminaire in compliance with EN 60598-1/2-22 and EN 1838.

Extremely slim, attractive housing made of polycarbonate in white or black with clear hood including a Stucchi adapter for mounting in compatible 3-phase tracks. Screwless, easy-to-use locking mechanism.


Luminaire for area illumination. The luminaire is equipped with a 2 Watt LED-bar.

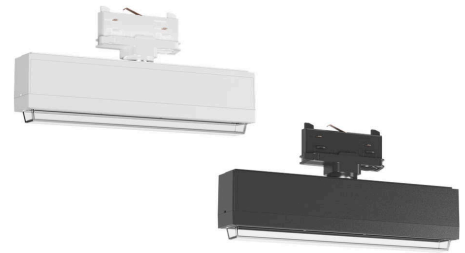

Technical specifications

Luminaire type	Self contained luminaires
Illuminant	2 W LED-bar
Colour	white / black
Material	Polycarbonate (light cover clear)
Mounting type	Track mounting
Dimensions (W x H x D)	SM 265 x 125 x 37 mm
Protection class	IP40
Safety class	see gear tray
IK Safety class	IK03
Light current (mains)	240 lm
Light current (emergency)	
Rated operating time 1h	240 lm
Rated operating time 3h	105 lm
Luminous flux	
Emergency (DC) / mains	
Rated operating time 1h	100% / 100%
Rated operating time 3h	45% / 100%
Power consumption	5.5 VA
Battery duration	
Battery operation	1h / 3h
Voltage supply	230V 50/60Hz
NiMH-battery	
Rated operating time 1h	4,8V 0,8Ah
Rated operating time 3h	4,8V 0,8Ah
Temperature range	
Non-maintained mode	0°C to +35°C
Maintained mode	-5°C to +30°C
optional	
Self monitoring	SELF CHECK
Wireless monitoring	SAFELOG Wireless

Track mounting

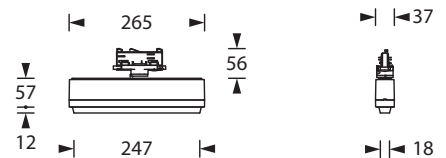


Use for 3-phase tracks

The product is currently tested for use in the following tracks:

Manufacturer	Manufacturer Art. No.	Type	Remarks
Eutrac	99-759	3-phase track	compatible
Iguzzini	K777	3-phase track	compatible
Ivela	7601	3-phase track	compatible
Lumisys Unipro	A75	3-phase track	compatible
Nordic Global	GA100	3-phase track	compatible
Nordic Global	GA69	3-phase track	compatible
Nordic Global	XTSA 68	3-phase track	compatible
Powergear	Pro-0440	3-phase track	compatible
Powergear	Pro-0440-S	3-phase track	compatible
Reggiani	2270	3-phase track	compatible
Stucchi	9000-.../...-ST	3-phase track	compatible
Targetti	N55...	3-phase track	compatible
Zumtobel	T 12076	3-phase track	compatible


Lighting data and tables of luminaire distances (E = 1,25 lx)



Ceiling mounting

Self contained luminaires Wide area illumination

Distance table for plane emergency routes / distance data in meters




Luminous flux emergency / mains: 240lm/240lm – **Rated operating time: 1h**

h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00
a	6.80	7.50	7.80	8.60	8.90	9.20	9.40	9.60	9.70	9.80
b	1.80	1.90	1.90	1.90	1.80	1.70	1.60	1.40	1.20	0.70
c	7.40	7.80	8.40	8.90	9.30	9.50	9.80	10.00	10.00	10.00
d	1.90	1.90	2.00	2.00	1.70	1.60	1.60	1.60	1.20	0.70

Self contained luminaires Wide area illumination

Distance table for plane emergency routes / distance data in meters



Luminous flux emergency / mains: 105lm/240lm – **Rated operating time: 3h**

h	2.50	3.00	3.50	4.00	4.50
a	5.30	5.90	6.20	6.10	6.50
b	1.20	1.20	1.10	0.90	0.60
c	5.80	6.10	6.40	6.60	6.70
d	1.30	1.10	1.10	1.00	0.60