



# S-LINE 200 3P

## Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.

Extremely slim, attractive housing made of polycarbonate including a Stucci adapter for mounting in compatible 3-phase tracks. Screwless, easy-to-use locking mechanism.


The 10 mm light deflecting pane is illuminated with a 2 Watt LED-bar and supplied with a pictogram set - arrow left/right/down/up/blind (Visibility distance 23 m).

## Technical specifications

| Luminaire type              | Self contained luminaires |
|-----------------------------|---------------------------|
| Illuminant                  | 2 W LED-bar               |
| Visibility distance         | 23 m                      |
| Colour                      | white / black             |
| Material                    | Polycarbonate             |
| Mounting type               | Track mounting            |
| Dimensions (W x H x D)      | SM 265 x 247 x 37 mm      |
| Pane dimensions (W x H x D) | 248 x 148 x 10 mm         |
| Protection class            | IP40                      |
| Safety class                | see gear tray             |
| IK Safety class             | IK03                      |
| Light current (mains)       | 260 lm                    |
| Luminous flux               |                           |
| Emergency (DC) / mains      |                           |
| Battery duration 1h         | 30% / 100%                |
| Battery duration 3h         | 30% / 100%                |
| Battery duration 8h         | 15% / 100%                |
| Power consumption           | 5.5 VA                    |
| Battery duration            | 1h / 3h / 8h              |
| Battery operation           |                           |
| Voltage supply              | 230V 50/60Hz              |
| NiMH-battery                |                           |
| Battery duration 1h         | 4,8V 0,8Ah                |
| Battery duration 3h         | 4,8V 0,8Ah                |
| Battery duration 8h         | 4,8V 0,8Ah                |
| Temperature range           |                           |
| Non-maintained mode         | 0°C to +35°C              |
| Maintained mode             | -5°C to +30°C             |
| optional                    |                           |
| Self monitoring             | SELF CHECK                |
| Wireless monitoring         | SAFELOG Wireless          |



## Track mounting

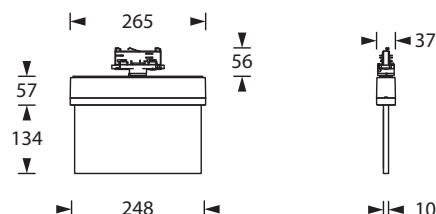

## Pictogram-set - included in the delivery



## Accessories

Pictograms

## Use for 3-phase tracks

The product is currently tested for use in the following tracks:

| Manufacturer   | Manufacturer Art. No. | Type          | Remarks    |
|----------------|-----------------------|---------------|------------|
| Eutrac         | 99-759                | 3-phase track | compatible |
| Iguzzini       | K777                  | 3-phase track | compatible |
| Ivela          | 7601                  | 3-phase track | compatible |
| Lumisys Unipro | A75                   | 3-phase track | compatible |
| Nordic Global  | GA100                 | 3-phase track | compatible |
| Nordic Global  | GA69                  | 3-phase track | compatible |
| Nordic Global  | XTSA 68               | 3-phase track | compatible |
| Powergear      | Pro-0440              | 3-phase track | compatible |
| Powergear      | Pro-0440-S            | 3-phase track | compatible |
| Reggiani       | 2270                  | 3-phase track | compatible |
| Stucchi        | 9000-.../...-ST       | 3-phase track | compatible |
| Targetti       | N55...                | 3-phase track | compatible |
| Zumtobel       | T 12076               | 3-phase track | compatible |