



H-LINE 200 UM

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.

Slim polycarbonate housing with narrow, transparent cover for pictograms to be inserted on both sides for universal mounting. Optionally usable for wall or ceiling mounting due to pre-stamped mounting and cable entry openings from above or behind. Screwless, easy-to-use locking mechanism. With optional recessed ceiling frame also available as recessed ceiling version. The luminaire is available with a 1 or 2 watt LED-bar and is supplied with a set of interchangeable pictogram foils - arrow left/right/down/up/blind (Visibility distance 23 m).


Technical specifications

Luminaire type	Luminaires for central battery systems		Self contained luminaires	
Illuminant	1 W LED-bar	2 W LED-bar	1 W LED-bar	2 W LED-bar
Visibility distance	23 m			
Luminance	DIN 4844-1 > 500 cd/m²			
Connecting terminals	2 x 2.5 mm² for double assignment			
Colour	white			
Material	Polycarbonate (light cover clear)			
Mounting type	Wall-/ceiling mounting			
Additional mounting types*	wall bracket mounting, Ceiling mounting (wire suspension), Recessed mounting, Pendulum mounting			
Dimensions (W x H x D)	WM/DM 265 x 184 x 37 mm			
Protection class	IP43			
Safety class	II			
IK Safety class	IK03			
Light current (mains)	130 lm	260 lm	130 lm	260 lm
Luminous flux				
Emergency (DC) / mains				
Battery duration 1h	–	–	50% / 100%	30% / 100%
Battery duration 3h	–	–	50% / 100%	30% / 100%
Battery duration 8h	–	–	25% / 100%	15% / 100%
Power consumption	4.5 VA	5.5 VA	4.5 VA	5.5 VA
Battery current input	11 mA	14 mA	–	
Battery duration	–		1h / 3h / 8h	
Battery operation				
Voltage supply	230V 50/60Hz; 220V DC +25/-20%		230V 50/60Hz	
NiMH-battery				
Battery duration 1h	–	–	4,8V 0,8Ah	4,8V 0,8Ah
Battery duration 3h	–	–	4,8V 0,8Ah	4,8V 0,8Ah
Battery duration 8h	–	–	4,8V 0,8Ah	4,8V 0,8Ah
Temperature range	-10°C to +40°C		–	
Non-maintained mode	–		0°C to +35°C	
Maintained mode	–		-5°C to +30°C	
optional				
Multi-switch and monitoring module	ELC MSÜ3 SET009 SET010		–	
Self monitoring	–		SELF CHECK	
Central monitoring	–		SAFELOG Line	
Wireless monitoring	–		SAFELOG Wireless	


* Optional accessory required



Ceiling mounting

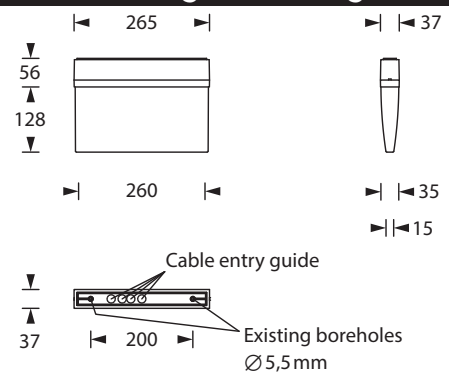

Wall mounting

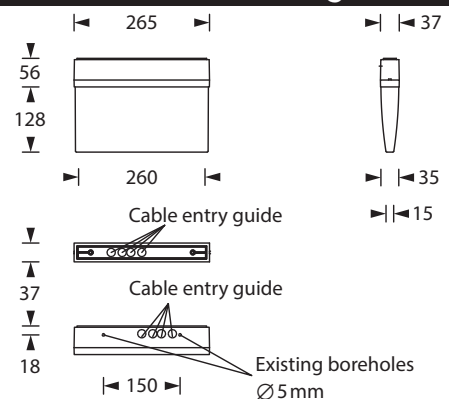

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Wire guard
Cement assembly box
Recessed ceiling frame - clampable
Universal cover plate
Chain assembly set
Double pendulum set with long canopy
Central pendulum sets with long canopy
Central pendulum - Plastic
Wire sets with long canopy
Cable assembly set
Wall bracket
Pictograms