



SBOX V2A 300 WM

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.

Very robust exit luminaire made of brushed stainless steel (V2A) for wall mounting. The luminaire is equipped with an IP65 membrane pressure compensation valve and a pane of 8 mm toughened safety glass as standard.


The luminaire is equipped with a 6 Watt LED LED-bar and is supplied with a pictogram set - arrow left/right/down/up/blind (Visibility distance 34 m).

Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	6 W LED-bar	6 W LED-bar
Visibility distance	34 m	
Luminance	DIN 4844-1 > 500 cd/m ²	
Connecting terminals	3 x 2.5 mm ² for double assignment	
Colour	Stainless steel brushed	
Material	Stainless steel (V2A)	
Mounting type	Wall mounting	
Dimensions (W x H x D)	WM 384 x 234 x 101 mm	
Protection class	IP65	
Safety class	I	
IK Safety class	IK10	
Light current (mains)	600 lm	600 lm
Luminous flux		
Emergency (DC) / mains		
Battery duration 1h	–	30% / 100%
Battery duration 3h	–	30% / 100%
Battery duration 8h	–	15% / 100%
Power consumption	10.3 VA	12.5 VA
Battery current input	27 mA	–
Battery duration	–	1h / 3h / 8h
Battery operation		
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Battery duration 1h	–	4,8V 2,0Ah
Battery duration 3h	–	4,8V 2,0Ah
Battery duration 8h	–	4,8V 2,0Ah
Temperature range	-10°C to +40°C	–
Non-maintained mode	–	0°C to +35°C
Maintained mode	–	-5°C to +30°C
optional		
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010/025	–
Self monitoring	–	SELF CHECK
Central monitoring	–	SAFELOG Line
Wireless monitoring	–	SAFELOG Wireless



Wall mounting

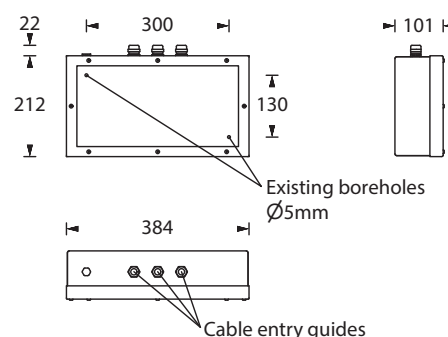

Pictogram-set - included in the delivery

