

INDEPENDENCE 200 DMS

Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.

Flat, architectural high quality stainless steel case with shapely, slim enclosure of light guide pane.

Version for ceiling mounting with wire suspension (rope 1,5m) for the disc unit.

Optionally, the luminaire is available from the factory with a 2 x 5 m or a 2 x 10 m live cable.

The luminaire price includes one pictogram set - arrow left/right/down/up/blind (Visibility distance 23 m).


The 15 mm light-deflecting pane is supplied with a 2 Watt LED-bar.

Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	2 W LED-bar	2 W LED-bar
Visibility distance	23 m	
Luminance	DIN 4844-1 > 500 cd/m²	
Connecting terminals	3 x 2.5 mm² for double assignment	
Colour	Stainless steel brushed	
Material	Stainless steel (V4A)	
Mounting type	Ceiling mounting (wire suspension)	
Dimensions (W x H x D)	DMS 251 x 195 x 56 mm	
Pane dimensions (W x H x D)	251.4 x 146.6 x 15 mm	
Protection class	IP40	
Safety class	I	
IK Safety class	IK03	
Light current (mains)	260 lm	260 lm
Luminous flux	-	30% / 100%
Emergency (DC) / mains		30% / 100%
Battery duration 1h		15% / 100%
Battery duration 3h		-
Battery duration 8h	-	-
Power consumption	5.5 VA	5.5 VA
Battery current input	14 mA	-
Battery duration	-	1h / 3h / 8h
Battery operation	-	-
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery	-	4,8V 0,8Ah
Battery duration 1h		4,8V 0,8Ah
Battery duration 3h		4,8V 0,8Ah
Battery duration 8h		-
Temperature range	-10°C to +40°C	-
Non-maintained mode	-	0°C to +35°C
Maintained mode	-	-5°C to +30°C
optional	DALI ELC MSÜ3 SET009 SET010/025	-
Multi-switch and monitoring module		-
Self monitoring		SELF CHECK
Central monitoring		SAFELOG Line
Wireless monitoring	-	SAFELOG Wireless



Ceiling mounting (wire suspension)

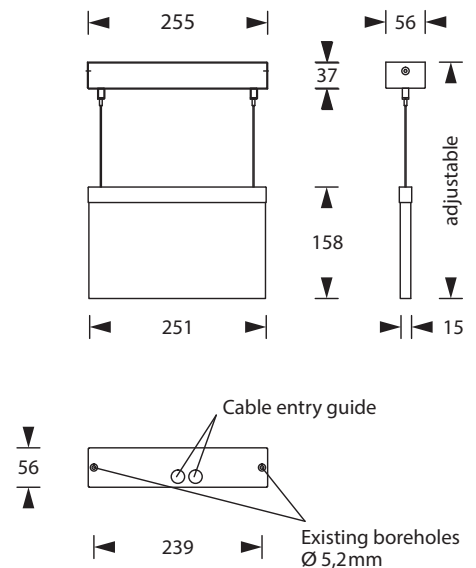

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Pictograms