3W LED | IP40 | Farbe / Colour

BEAM AC-F

Extremely flat aluminium die-cast casing in an appealing design.

Easy to handle locking mechanism without screws.

Ceiling-mounted model with cast acrylics look for wide area lighting by way of circular, light-deflecting characteristics.

Technical specifications

Connecting terminals	3 x 2,5 mm² for double assignment
Casing/colour	Aluminum die-cast / white other colours available on request
Type of assembly	Ceiling mounting
Dimensions (W x H x D)	180 x 35 x 180 mm
Protection class	IP40
Safety class	I

	Luminaires for central battery systems	Self contained luminaires
Illuminant	3W LED	3W LED
Light current	280lm	50lm (net)
Rated operating time 1h/3h	-	280lm (emergency)
Rated operating time 8h	-	120lm (emergency)
Luminous flux		
Emergency (DC) / mains 1h/3h	-	100% / 20%
Emergency (DC) / mains 8h	-	50% / 20%
Power consumption	6VA	5VA
Battery current input	15mA	-
Voltage supply	230V 50/60Hz / 220V DC +25/-20%	230V 50/60Hz
NiMh-Akku 1h/3h/8h	-	4,8V 2,0Ah
Temperature range	-10°C to +40°C	-
non-maintained mode	-	-0°C to +35°C
maintained mode	-	-5°C to +30°C
optional:		
Multi-switch and monitoring module	ELC, MSÜ3, SET009, SET010, DALI	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG Line SAFELOG Wireless



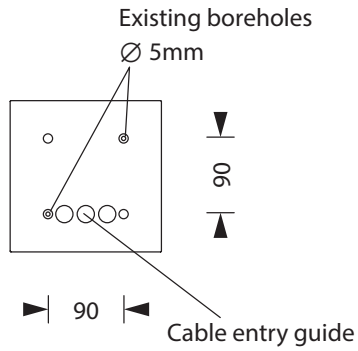

Accessories

Wire guard
Cable assembly set (not for self contained luminaire)
Back box



Technische Änderungen vorbehalten / Technical changes reserved

Lighting datas and tables of luminaire distances (E = 1,25 lx)



Ceiling mounting

Luminaires for central battery systems **wide area optic**

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED



Luminous flux emergency (DC)/mains: 280lm / 280lm

h	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	11,50
a	10,50	11,90	13,20	14,10	14,60	14,90	14,80	14,60	14,20	12,00	9,90	7,80	-	-	-	-	-	-	-
b	4,70	5,10	5,20	5,20	5,00	4,50	3,30	2,00	0,90	0,80	0,80	0,80	-	-	-	-	-	-	-
c	10,50	11,90	13,20	14,10	14,60	14,90	14,80	14,60	14,20	12,00	9,90	7,80	-	-	-	-	-	-	-
d	4,70	5,10	5,20	5,20	5,00	4,50	3,30	2,00	0,90	0,80	0,80	0,80	-	-	-	-	-	-	-

Self contained luminaire **wide area optic**

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED



Luminous flux emergency (DC)/mains: 280lm/50lm – **Rated operating time: 1h/3h**

h	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	11,50
a	10,50	11,90	13,20	14,10	14,60	14,90	14,80	14,60	14,20	12,00	9,90	7,80	-	-	-	-	-	-	-
b	4,70	5,10	5,20	5,20	5,00	4,50	3,30	2,00	0,90	0,80	0,80	0,80	-	-	-	-	-	-	-
c	10,50	11,90	13,20	14,10	14,60	14,90	14,80	14,60	14,20	12,00	9,90	7,80	-	-	-	-	-	-	-
d	4,70	5,10	5,20	5,20	5,00	4,50	3,30	2,00	0,90	0,80	0,80	0,80	-	-	-	-	-	-	-

Illuminant: 3W LED



Luminous flux emergency (DC)/mains: 120lm/50lm – **Rated operating time: 8h**

h	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	11,50
a	9,00	9,60	9,70	9,50	7,70	6,00	-	-	-	-	-	-	-	-	-	-	-	-	-
b	3,40	3,20	2,40	1,10	1,00	1,00	-	-	-	-	-	-	-	-	-	-	-	-	-
c	9,00	9,60	9,70	9,50	7,70	6,00	-	-	-	-	-	-	-	-	-	-	-	-	-
d	3,40	3,20	2,40	1,10	1,00	1,00	-	-	-	-	-	-	-	-	-	-	-	-	-