

23m

1W
LED2W
LED

IP40

SMARTLINE E200-S

Almost ceiling flush casing from sheet steel with clip-on cover plate from aluminum die-cast, powder-coated in white.

Steplessly adjustable clip mechanism for various ceiling thicknesses.


Available as recessed ceiling version with a 10mm light-deflecting pane and exchangeable pictograms.

Optionally available with 1 watt or 2 watt LED-bar.

Technical specifications

Visibility distance	23 m
Connecting terminals	3 x 2,5 mm ² for double assignment
Casing/colour	Sheet steel/aluminum die-cast, white other colours available on request
Type of assembly	Recessed mounting
Dimensions (W x H x D)	327 x 200 x 76 mm
Protection class	IP40
Safety class	I

	■ Luminaires for central battery systems		■ Self contained luminaires	
	1W LED-bar	2W LED-bar	1W LED-bar	2W LED-bar
Illuminant				
Light current mains operation	130lm	260lm	130lm	260lm
Luminous flux				
Emergency (DC)/mains	-		15% - 50% / 100%	
Power consumption	4,5VA	5,5VA	4,5VA	5,5VA
Battery current input	11mA	14mA	-	
Rated operating time				
Battery operation	-		1h/3h/8h	
Voltage supply	230V 50/60Hz / 220V DC +25/-20%		230V 50/60Hz	
NiMh-Akku	-		4,8V 0,8Ah	
Temperature range	-10°C to +40°C		-	
non-maintained mode	-		-0°C to +35°C	
maintained mode	-		-5°C to +30°C	
optional:				
Multi-switch and monitoring module	MSÜ3 SET009 SET010 -	MSÜ3 SET009 SET010 DALI	-	
Self monitoring	-		SELF CHECK	
Central monitoring	-		SAFELOG	

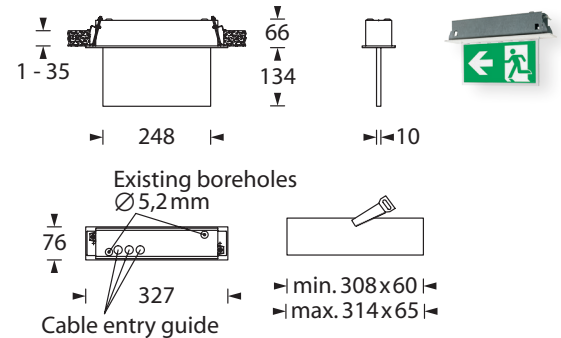

Accessories

Cement assembly box E200-S

Pictogram-set*

		Exit pictogram FR
		Exit pictogram FL
		Exit pictogram FU
		Blind pane

* Pictogram-set included in the delivery.
Other pictograms available on request.