



BEAM E-F

Safety luminaire in compliance with EN IEC 60598-1/2-22 and EN 1838.

Almost ceiling-flush housing from aluminium die-casting, with clip-on cover plate for easy lamp replacement.

Steplessly adjustable clip mechanism for various ceiling thicknesses.


Cast acrylics look for wide area lighting by way of circular, light-deflecting characteristics.

Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	3 W LED	3 W LED
Connecting terminals	3 x 2.5 mm ² for double assignment	
Colour	white	
Material	Aluminum die-cast	
Mounting type	Recessed mounting	
Dimensions (Ø x D)	200 x 73 mm	
Ceiling cutout (Ø)	185 mm	
Installation depth	103 mm	
Protection class	IP32	
Safety class	I	
IK Safety class	IK03	
Light current (mains)	240 lm	50 lm
Light current (emergency)		
Battery duration 1h	–	240 lm
Battery duration 3h	–	240 lm
Battery duration 8h	–	110 lm
Luminous flux		
Emergency (DC) / mains		
Battery duration 1h	–	100% / 20%
Battery duration 3h	–	100% / 20%
Battery duration 8h	–	50% / 20%
Power consumption	6 VA	5 VA
Battery current input	15 mA	–
Battery duration	–	1h / 3h / 8h
Battery operation	–	–
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Battery duration 1h	–	4,8V 2,0Ah
Battery duration 3h	–	4,8V 2,0Ah
Battery duration 8h	–	4,8V 2,0Ah
Temperature range	-10°C to +40°C	–
Non-maintained mode	–	0°C to +35°C
Maintained mode	–	-5°C to +30°C
optional		
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010	–
Self monitoring	–	SELF CHECK
Central monitoring	–	SAFELOG Line
Wireless monitoring	–	SAFELOG Wireless




Recessed mounting

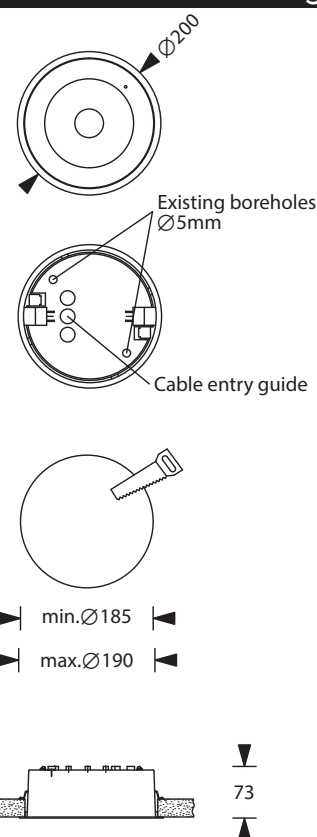

Accessories

Ceiling frame BEAM E - Aluminum


Lighting data and tables of luminaire distances (E = 1,25 lx)



Ceiling mounting


Luminaires for central battery systems wide area optics

Distance table for plane emergency routes / distance data in meters

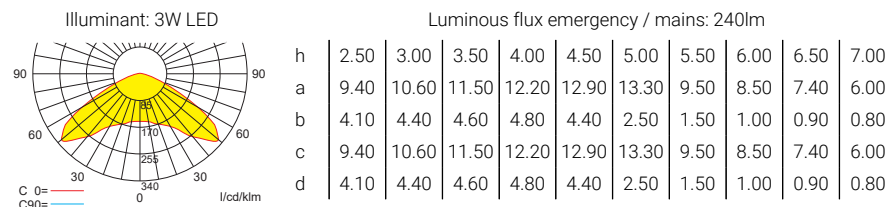


Self contained luminaires wide area optics

Distance table for plane emergency routes / distance data in meters

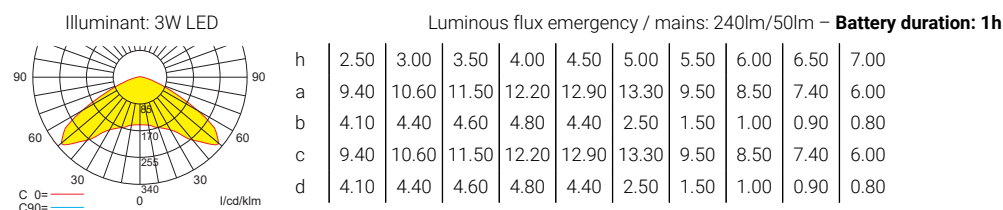

Self contained luminaires wide area optics

Distance table for plane emergency routes / distance data in meters

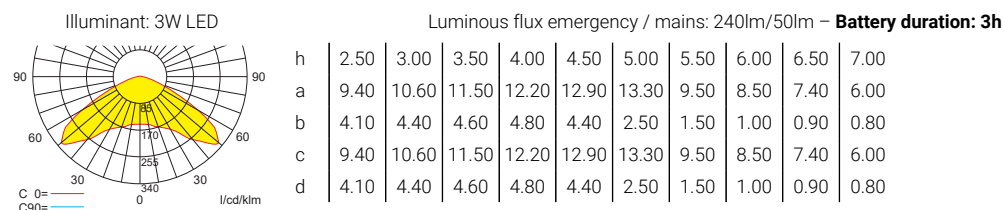

Self contained luminaires wide area optics

Distance table for plane emergency routes / distance data in meters

