



PROTECT BEL-R DM

Safety luminaire in compliance with EN 60598-1/2-22 and EN 1838.

Safety luminaire with protection class IP65 made of polycarbonate with clear light cover and snap-in optics for escape route illumination for ceiling mounting.

For unprotected outdoor mounting we offer an accessory set with pressure equalization valve. In the versions with battery heating and external supply, the pressure equalization valve is always integrated in the luminaire.

The luminaire is optionally available as a set with supply unit for indoor installation and luminaire unit for outdoor installation.

Alternatively, the luminaire is available with heating container incl. battery 4.8V 4.2Ah for LED 3W and 6W (3h) / 6W (8h) to extend the temperature range to -20°C.

Optionally, the luminaire can be supplied as a central battery variant for a temperature range down to -35°C (unmonitored).



Technical specifications


Luminaire type	Luminaires for central battery systems			Self contained luminaires	
	3 W LED-bar	6 W LED-bar	10 W LED-bar	3 W LED-bar	6 W LED-bar
Connecting terminals	2 x 2.5 mm ² for double assignment				
Colour	white				
Material	Polycarbonate (light cover clear)				
Mounting type	Ceiling mounting				
Additional mounting types*	Ceiling mounting (wire suspension), Pendulum mounting				
Dimensions (W x H x D)	DM 370 x 140 x 93 mm				
Protection class	IP65				
Safety class	II				
IK Safety class	IK08				
Light current (mains)	350 lm	600 lm	1050 lm	350 lm	580 lm
Light current (emergency)					
Rated operating time 1h	-	-	-	350 lm	580 lm
Rated operating time 3h	-	-	-	350 lm	580 lm
Rated operating time 8h	-	-	-	-	320 lm
Luminous flux					
Emergency (DC) / mains					
Rated operating time 1h	-	-	-	100% / 100%	100% / 100%
Rated operating time 3h	-	-	-	100% / 100%	100% / 100%
Rated operating time 8h	-	-	-	-	55% / 100%
Power consumption	6 VA	10.3 VA	15 VA	6 VA	11.5 VA
Battery current input	19 mA	27 mA	41 mA		
Battery duration					
Battery operation				1h / 3h / 8h	
Voltage supply	230V 50/60Hz; 220V DC +25/-20%			230V 50/60Hz	
NiMH-battery					
Rated operating time 1h	-	-	-	4,8V 2,0Ah	4,8V 2,0Ah
Rated operating time 3h	-	-	-	4,8V 4,2Ah	4,8V 4,2Ah
Rated operating time 8h	-	-	-	4,8V 4,2Ah + AkH	4,8V 4,2Ah + AkH
					4,8V 4,2Ah
					4,8V 4,2Ah + AkH
Temperature range	-10°C to +40°C			-	
Non-maintained mode				0°C to +35°C	
Maintained mode				-5°C to +30°C	
optional					
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010			-	
Self monitoring				SELF CHECK	
Central monitoring				SAFELOG Line	
Wireless monitoring				SAFELOG Wireless	

* Optional accessory required



Accessories

Universal cover plate
Pressure compensation valve
Pole and wall bracket
Double pendulum set with long canopy
Central pendulum sets with long canopy
Central pendulum - Plastic
Wire sets with long canopy
Cable assembly set

Ceiling mounting

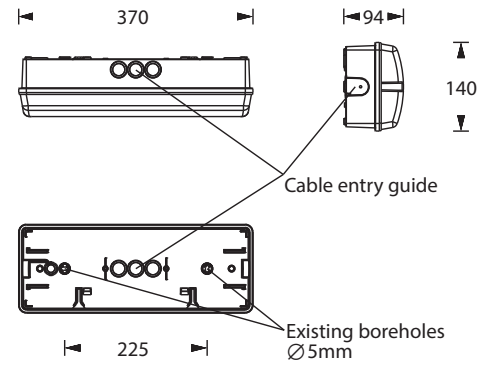

Lighting data and tables of luminaire distances (E = 1,25 lx)




Ceiling mounting

Mounting direction


Luminaires for central battery systems escape route optics

Distance table for plane emergency routes / distance data in meters

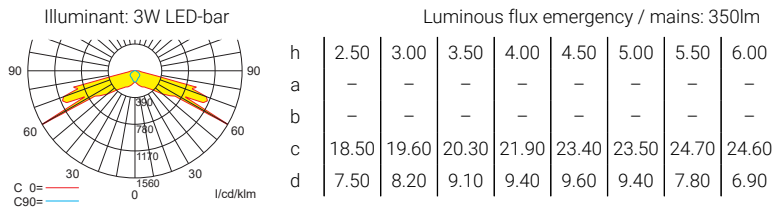


Luminaires for central battery systems escape route optics

Distance table for plane emergency routes / distance data in meters

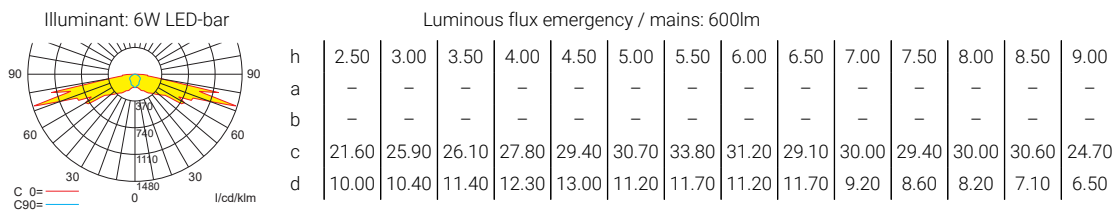


Luminaires for central battery systems escape route optics

Distance table for plane emergency routes / distance data in meters

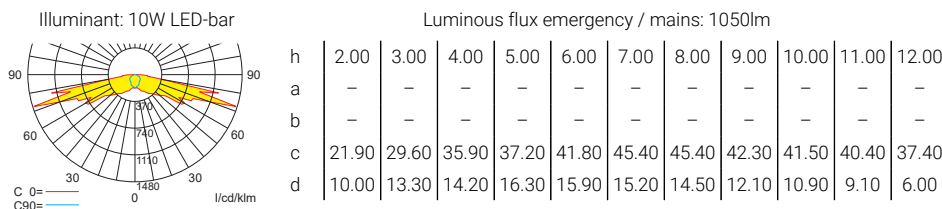


Self contained luminaires escape route optics

Distance table for plane emergency routes / distance data in meters

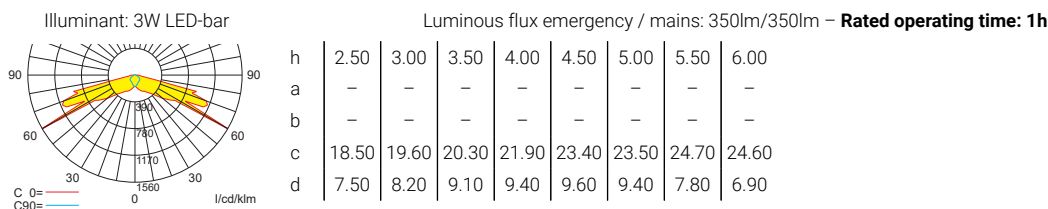

Self contained luminaires escape route optics

Distance table for plane emergency routes / distance data in meters




Luminous flux emergency / mains: 580lm/580lm – **Rated operating time: 1h**

h	2.00	3.00	4.00	5.00	6.00	7.00	8.00	9.00
a	-	-	-	-	-	-	-	-
b	-	-	-	-	-	-	-	-
c	20.56	26.25	30.67	33.68	35.33	35.88	33.93	31.89
d	8.98	11.18	12.39	12.76	12.51	13.94	8.52	0.47

Self contained luminaires escape route optics

Distance table for plane emergency routes / distance data in meters




Luminous flux emergency / mains: 350lm/350lm – **Rated operating time: 3h**

h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00
a	-	-	-	-	-	-	-	-
b	-	-	-	-	-	-	-	-
c	18.50	19.60	20.30	21.90	23.40	23.50	24.70	24.60
d	7.50	8.20	9.10	9.40	9.60	9.40	7.80	6.90

Self contained luminaires escape route optics

Distance table for plane emergency routes / distance data in meters




Luminous flux emergency / mains: 580lm/580lm – **Rated operating time: 3h**

h	2.00	3.00	4.00	5.00	6.00	7.00	8.00	9.00
a	-	-	-	-	-	-	-	-
b	-	-	-	-	-	-	-	-
c	20.56	26.25	30.67	33.68	35.33	35.88	33.93	31.89
d	8.98	11.18	12.39	12.76	12.51	13.94	8.52	0.47

Self contained luminaires escape route optics

Distance table for plane emergency routes / distance data in meters



Luminous flux emergency / mains: 320lm/580lm – **Rated operating time: 8h**

h	2.00	3.00	4.00	5.00	6.00			
a	-	-	-	-	-			
b	-	-	-	-	-			
c	18.33	22.89	25.72	26.61	25.38			
d	7.84	9.22	9.35	10.08	6.25			