



ABOX 600 UM

Exit luminaire in compliance with EN 60598-1/2-22 and EN 1838.

Modern IP54 exit sign luminaire made of anodized aluminum for wall or ceiling surface mounting. For wall mounting, installation is via the rear panel of the luminaire, for ceiling mounting via an adapter supplied with the luminaire.

In addition, the luminaire has light emission windows facing downwards.

The luminaire price includes one ceiling adapter, one rear panel and one pictogram set - arrow left/right/down/up/blind (Visibility distance 60 m).


The luminaire is equipped with a 2x 3 Watt LED-bar.




Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	2 x 3 W LED-bar	2 x 3 W LED-bar
Visibility distance	60 m	
Connecting terminals	3 x 2.5 mm ² for double assignment	
Colour	white aluminum (silver)	
Material	Aluminum	
Mounting type	Wall-/ceiling mounting	
Dimensions (W x H x D)	DM 621 x 344 x 80 mm WM 621 x 325 x 81 mm	
Protection class	IP54	
Safety class	I	
IK Safety class	IK03	
Light current (mains)	1000 lm	1000 lm
Luminous flux		
Emergency (DC) / mains		
Rated operating time 1h	-	20% / 100%
Rated operating time 3h	-	20% / 100%
Rated operating time 8h	-	10% / 100%
Power consumption	15 VA	18 VA
Battery current input	41 mA	-
Battery duration	-	1h / 3h / 8h
Battery operation		
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Rated operating time 1h	-	4,8V 2,0Ah
Rated operating time 3h	-	4,8V 2,0Ah
Rated operating time 8h	-	4,8V 2,0Ah
Temperature range	-10°C to +40°C	-
Non-maintained mode	-	0°C to +35°C
Maintained mode	-	-5°C to +30°C
optional		
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG Line
Wireless monitoring	-	SAFELOG Wireless

Ceiling mounting

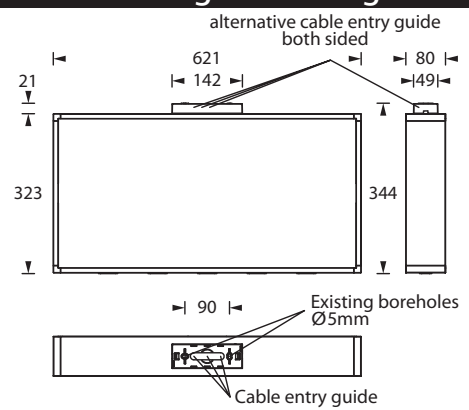

Wall mounting

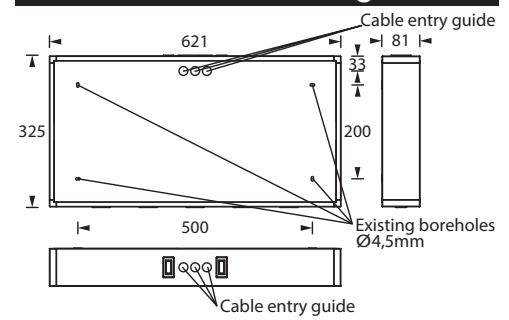

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Wire guard

Chain assembly set

Central pendulum - Plastic

Cable assembly set

Pictograms