



# SMARTLUX 200 BEL WM/DM

## Safety luminaire in compliance with EN 60598-1/2-22 and EN 1838.

Appealing, modern IP54 safety luminaire for area illumination made of white polycarbonate with clear luminaire cover and simple, screwless mounting by click system.

The luminaire is equipped with a 2 Watt LED strip.




## Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	2 W LED-bar	2 W LED-bar
Connecting terminals	2 x 2.5 mm <sup>2</sup> for double assignment	
Colour	white	
Material	Polycarbonate (light cover clear)	
Mounting type	Wall-/ceiling mounting	
Additional mounting types*	Recessed mounting, Ceiling mounting (wire suspension), Pendulum mounting	
Dimensions (W x H x D)	WM/DM 243 x 139 x 54 mm	
Protection class	IP54	
Safety class	II	
IK Safety class	IK03	
Light current (mains)	240 lm	240 lm
Light current (emergency)		
Rated operating time 1h	-	240 lm
Rated operating time 3h	-	240 lm
Rated operating time 8h	-	110 lm
Luminous flux		
Emergency (DC) / mains		
Rated operating time 1h	-	100% / 100%
Rated operating time 3h	-	100% / 100%
Rated operating time 8h	-	45% / 100%
Power consumption	5.5 VA	5.5 VA
Battery current input	14 mA	-
Battery duration		
Battery operation	-	1h / 3h / 8h
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Rated operating time 1h	-	4,8V 2,0Ah
Rated operating time 3h	-	4,8V 2,0Ah
Rated operating time 8h	-	4,8V 2,0Ah
Temperature range	-10°C to +40°C	-
Non-maintained mode	-	0°C to +35°C
Maintained mode	-	-5°C to +30°C
optional		
Multi-switch and monitoring module	ELC MSÜ3 SET009 SET010	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG Line
Wireless monitoring	-	SAFELOG Wireless

\* Optional accessory required

## Wall-/ceiling mounting

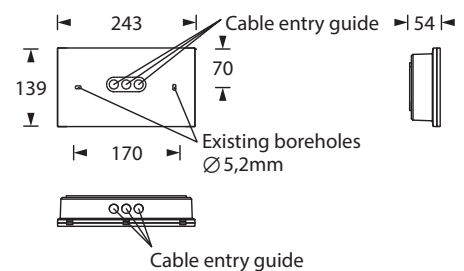

## Accessories

Wire guard


Recessed frame - set

Universal cover plate

Central pendulum - Plastic

Cable assembly set


## Lighting data and tables of luminaire distances (E = 1,25 lx)

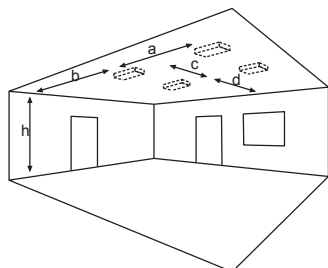

Ceiling mounting

### Luminaires for central battery systems **Wide area illumination**

Distance table for plane emergency routes / distance data in meters




Luminous flux emergency / mains: 240lm

h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
a	8.90	9.50	10.00	10.40	10.60	10.80	10.80	10.80	10.70	10.40	10.10
b	3.50	3.70	3.80	3.80	3.70	3.60	3.50	3.10	2.70	2.10	1.00
c	8.70	9.40	9.90	10.30	10.50	10.70	10.70	10.70	10.50	10.30	9.90
d	3.50	3.70	3.70	3.80	3.70	3.60	3.40	3.10	2.70	2.00	0.90

### Self contained luminaires **Wide area illumination**

Distance table for plane emergency routes / distance data in meters




Luminous flux emergency / mains: 240lm/240lm – **Rated operating time: 1h**

h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
a	8.90	9.50	10.00	10.40	10.60	10.80	10.80	10.80	10.70	10.40	10.10
b	3.50	3.70	3.80	3.80	3.70	3.60	3.50	3.10	2.70	2.10	1.00
c	8.70	9.40	9.90	10.30	10.50	10.70	10.70	10.70	10.50	10.30	9.90
d	3.50	3.70	3.70	3.80	3.70	3.60	3.40	3.10	2.70	2.00	0.90

### Self contained luminaires **Wide area illumination**

Distance table for plane emergency routes / distance data in meters




Luminous flux emergency / mains: 240lm/240lm – **Rated operating time: 3h**

h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50
a	8.90	9.50	10.00	10.40	10.60	10.80	10.80	10.80	10.70	10.40	10.10
b	3.50	3.70	3.80	3.80	3.70	3.60	3.50	3.10	2.70	2.10	1.00
c	8.70	9.40	9.90	10.30	10.50	10.70	10.70	10.70	10.50	10.30	9.90
d	3.50	3.70	3.70	3.80	3.70	3.60	3.40	3.10	2.70	2.00	0.90

### Self contained luminaires **Wide area illumination**

Distance table for plane emergency routes / distance data in meters



Luminous flux emergency / mains: 110lm/240lm – **Rated operating time: 8h**

h	2.50	3.00	3.50	4.00	4.50	5.00					
a	6.90	7.10	7.30	7.30	7.20	6.90					
b	2.60	2.50	2.40	2.20	1.70	0.90					
c	6.80	7.10	7.20	7.20	7.10	6.80					
d	2.50	2.50	2.40	2.10	1.70	0.80					