



L-PLAST 250 BEL-R DM

Safety luminaire in compliance with EN 60598-1/2-22 and EN 1838.

Slim, attractive housing made of polycarbonate with clear hood for wall or ceiling mounting. Screwless, easy-to-use locking mechanism. Ceiling mounting with optional ceiling mounting frame.

The luminaire is equipped with a 2 Watt LED strip.



Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	2 W LED-bar	2 W LED-bar
Connecting terminals	2 x 2.5 mm ² for double assignment	
Colour	white	
Material	Polycarbonate (light cover clear)	
Mounting type	Ceiling mounting	
Additional mounting types*	Recessed mounting, Ceiling mounting (wire suspension)	
Dimensions (W x H x D)	DM 239 x 62 x 59 mm	
Protection class	IP54	
Safety class	II	
IK Safety class	IK03	
Light current (mains)	240 lm	240 lm
Light current (emergency)		
Rated operating time 1h	-	240 lm
Rated operating time 3h	-	105 lm
Luminous flux		
Emergency (DC) / mains		
Rated operating time 1h	-	100% / 100%
Rated operating time 3h	-	45% / 100%
Power consumption	5.5 VA	5.5 VA
Battery current input	14 mA	-
Battery duration	-	1h / 3h
Battery operation		
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Rated operating time 1h	-	4,8V 0,8Ah
Rated operating time 3h	-	4,8V 0,8Ah
Temperature range	-10°C to +40°C	-
Non-maintained mode	-	0°C to +35°C
Maintained mode	-	-5°C to +30°C
optional		
Multi-switch and monitoring module	ELC MSÜ3 SET009 SET010	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG Line
Wireless monitoring	-	SAFELOG Wireless

* Optional accessory required

Accessories


Wire guard

Recessed ceiling frame - clampable



Chain assembly set

Cable assembly set

Ceiling mounting

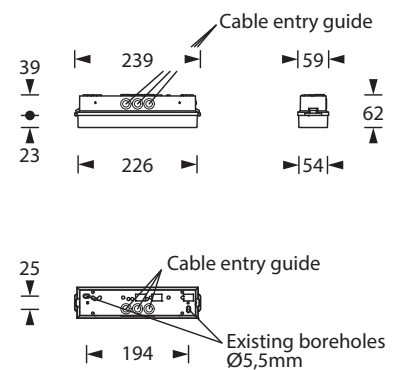

Lighting data and tables of luminaire distances (E = 1,25 lx)

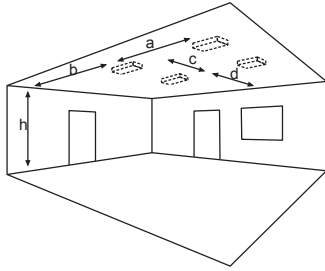


Ceiling mounting

Mounting direction

Luminaires for central battery systems **escape route optics**

Distance table for plane emergency routes / distance data in meters




Luminous flux emergency / mains: 240lm

h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50
a	-	-	-	-	-	-	-	-	-
b	-	-	-	-	-	-	-	-	-
c	18.60	20.90	21.50	22.00	13.30	14.20	14.20	14.10	7.00
d	7.60	8.70	4.90	5.30	5.70	5.70	5.70	4.70	4.50

Self contained luminaires **escape route optics**

Distance table for plane emergency routes / distance data in meters




Luminous flux emergency / mains: 240lm/240lm – **Rated operating time: 1h**

h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50
a	-	-	-	-	-	-	-	-	-
b	-	-	-	-	-	-	-	-	-
c	18.60	20.90	21.50	22.00	13.30	14.20	14.20	14.10	7.00
d	7.60	8.70	4.90	5.30	5.70	5.70	5.70	4.70	4.50

Self contained luminaires **escape route optics**

Distance table for plane emergency routes / distance data in meters



Luminous flux emergency / mains: 105lm/240lm – **Rated operating time: 3h**

h	2.50	3.00	3.50	4.00
a	-	-	-	-
b	-	-	-	-
c	14.30	13.50	9.90	9.60
d	3.50	3.60	3.60	2.70