



# BEAM 140-PC A-F

## Safety luminaire in compliance with EN 60598-1/2-22 and EN 1838.

Compact polycarbonate housing in an appealing design with round hollow of the surface. Easy to handle locking mechanism without screws. Version for ceiling mounting with one high-power LED (switching type: non-maintained mode) and cast acrylic optics for area illumination by circular light deflection characteristic. For unprotected outdoor installation, the luminaire can be optionally equipped with a pressure equalization valve to be installed on site.






## Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	3 W LED	3 W LED
Connecting terminals	2 x 2.5 mm <sup>2</sup> for double assignment	
Colour	white	
Material	Polycarbonate	
Mounting type	Ceiling mounting	
Additional mounting types*	Ceiling mounting (wire suspension)	
Dimensions (Ø x H)	DM 145 x 43 mm	
Protection class	IP65	
Safety class	II	
IK Safety class	IK03	
Light current (mains)	280 lm	120 lm
Light current (emergency)		
Rated operating time 1h	-	280 lm
Rated operating time 3h	-	280 lm
Rated operating time 8h	-	120 lm
Luminous flux		
Emergency (DC) / mains		
Rated operating time 1h	-	100% / 45%
Rated operating time 3h	-	100% / 45%
Rated operating time 8h	-	45% / 45%
Power consumption	6 VA	5 VA
Battery current input	15 mA	-
Battery duration	-	1h / 3h / 8h
Battery operation		
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Rated operating time 1h	-	4,8V 2,0Ah 4,8V 2,0Ah + AkH
Rated operating time 3h	-	4,8V 2,0Ah 4,8V 2,0Ah + AkH
Rated operating time 8h	-	4,8V 2,0Ah 4,8V 2,0Ah + AkH
Temperature range	-10°C to +40°C	-
Non-maintained mode	-	0°C to +35°C
Maintained mode	-	-5°C to +30°C
optional		
Multi-switch and monitoring module	ELC MSÜ3 SET009 SET010	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG Line
Wireless monitoring	-	SAFELOG Wireless

\* Optional accessory required

## Ceiling mounting

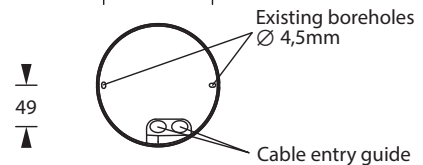

**Accessories**

- Wire guard

---


- Pressure compensation valve

---

- Cable assembly set

---


**Lighting data and tables of luminaire distances (E = 1,25 lx)**



Ceiling mounting

**Luminaires for central battery systems wide area optics**

**Distance table for plane emergency routes / distance data in meters**




Luminous flux emergency / mains: 280lm

h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50	8.00
a	9.90	11.10	12.20	13.30	14.30	14.80	14.50	14.30	13.60	12.70	11.00	9.50
b	4.30	4.90	5.40	5.80	5.20	4.20	3.40	2.40	1.20	1.00	1.00	1.00
c	9.90	11.10	12.20	13.30	14.30	14.80	14.50	14.30	13.60	12.70	11.00	9.50
d	4.30	4.90	5.40	5.80	5.20	4.20	3.40	2.40	1.20	1.00	1.00	1.00

**Self contained luminaires wide area optics**

**Distance table for plane emergency routes / distance data in meters**




Luminous flux emergency / mains: 280lm/120lm – **Rated operating time: 1h**

h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50	8.00
a	9.90	11.10	12.20	13.30	14.30	14.80	14.50	14.30	13.60	12.70	11.00	9.50
b	4.30	4.90	5.40	5.80	5.20	4.20	3.40	2.40	1.20	1.00	1.00	1.00
c	9.90	11.10	12.20	13.30	14.30	14.80	14.50	14.30	13.60	12.70	11.00	9.50
d	4.30	4.90	5.40	5.80	5.20	4.20	3.40	2.40	1.20	1.00	1.00	1.00

**Self contained luminaires wide area optics**

**Distance table for plane emergency routes / distance data in meters**




Luminous flux emergency / mains: 280lm/120lm – **Rated operating time: 3h**

h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50	8.00
a	9.90	11.10	12.20	13.30	14.30	14.80	14.50	14.30	13.60	12.70	11.00	9.50
b	4.30	4.90	5.40	5.80	5.20	4.20	3.40	2.40	1.20	1.00	1.00	1.00
c	9.90	11.10	12.20	13.30	14.30	14.80	14.50	14.30	13.60	12.70	11.00	9.50
d	4.30	4.90	5.40	5.80	5.20	4.20	3.40	2.40	1.20	1.00	1.00	1.00

**Self contained luminaires wide area optics**

**Distance table for plane emergency routes / distance data in meters**



Luminous flux emergency / mains: 120lm/120lm – **Rated operating time: 8h**

h	2.50	3.00	3.50	4.00	4.50	5.00
a	8.50	9.50	9.50	9.30	8.60	7.00
b	3.70	3.20	2.40	1.40	1.40	1.00
c	8.50	9.50	9.50	9.30	8.60	7.00
d	3.70	3.20	2.40	1.40	1.40	1.00