



INDEPENDENCE 200 DE

Exit luminaire in compliance with EN 60598-1/2-22 and EN 1838.

Flat, architectural high quality stainless steel case for recessed mounting with shapely, slim enclosure of light guide pane.

The luminaire price includes one pictogram set - arrow left/right/down/up/blind (Visibility distance 23 m).


The 15 mm light-deflecting pane is supplied with a 2 Watt LED-bar.

Technical specifications



Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	2 W LED-bar	2 W LED-bar
Visibility distance	23 m	
Connecting terminals	3 x 2.5 mm ² for double assignment	
Colour	Stainless steel brushed	
Material	Stainless steel (V4A)	
Mounting type	Recessed mounting	
Dimensions (W x H x D)	DE 325 x 239 x 74 mm	
Pane dimensions (W x H x D)	251.4 x 146.6 x 15 mm	
Dimensions ceiling cutout (L x W)	min. 308 x 60 mm / max. 314 x 65 mm	
Installation depth	97 mm	
Protection class	IP40	
Safety class	I	
IK Safety class	IK03	
Light current (mains)	260 lm	260 lm
Luminous flux Emergency (DC) / mains		
Rated operating time 1h	-	30% / 100%
Rated operating time 3h	-	30% / 100%
Rated operating time 8h	-	15% / 100%
Power consumption	5.5 VA	5.5 VA
Battery current input	14 mA	-
Battery duration	-	1h / 3h / 8h
Battery operation		
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Rated operating time 1h	-	4,8V 0,8Ah
Rated operating time 3h	-	4,8V 0,8Ah
Rated operating time 8h	-	4,8V 0,8Ah
Temperature range	-10°C to +40°C	-
Non-maintained mode	-	0°C to +35°C
Maintained mode	-	-5°C to +30°C
optional		
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG Line
Wireless monitoring	-	SAFELOG Wireless



Recessed mounting

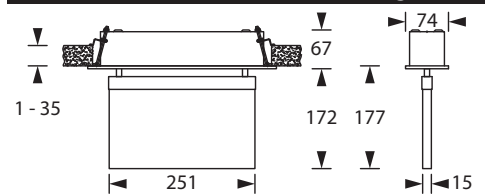

Existing boreholes Ø 5,2mm



min. 308 x 60
max. 314 x 65

Pictogram-set - included in the delivery



Optional pictograms (-sets)



Accessories

Cement assembly box

Pictograms